

SPECTRUM REPORT (WIFI)

Applicant: Dragino Technology Co., Limited.

Address of Applicant: Room 7009, Zi'An Commercial Building, Qian Jin 1 Road,
Xin'An 6th District, Baoan, Shenzhen, China

Equipment Under Test (EUT)

Product Name: Wireless Sensor Node / ATA

Model No.: DT01, MP2.0 Phone, MP2.0 Basic, MS14-P, MS14-S,
MS14-HEV

Applicable standards: ETSI EN 300 328 V1.8.1 (2012-06)

Date of sample receipt: December 01, 2015

Date of Test: December 02-14, 2015

Date of report issue: December 15, 2015

Test Result : PASS *

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EC Declaration of Conformity and compliance with all relevant EC Directives. The protection requirements with respect to electromagnetic compatibility contained in Directive 1999/5/EC are considered.



Robinson Lo

Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2 Version

| Version No. | Date | Description |
|-------------|-------------------|-------------|
| 00 | December 15, 2015 | Original |
| | | |
| | | |
| | | |
| | | |

Prepared By:

Edward Pan

Date:

December 15, 2015

Project Engineer

Check By:

Hank Yan

Date:

December 15, 2015

Reviewer

3 Contents

| | Page |
|---|------|
| 1 COVER PAGE | 1 |
| 2 VERSION | 2 |
| 3 CONTENTS | 3 |
| 4 TEST SUMMARY | 4 |
| 5 GENERAL INFORMATION | 5 |
| 5.1 CLIENT INFORMATION | 5 |
| 5.2 GENERAL DESCRIPTION OF EUT | 5 |
| 5.3 TEST MODE | 6 |
| 5.4 TEST FACILITY | 7 |
| 5.5 TEST LOCATION | 7 |
| 5.6 DESCRIPTION OF SUPPORT UNITS | 7 |
| 5.7 DEVIATION FROM STANDARDS | 7 |
| 5.8 ABNORMALITIES FROM STANDARD CONDITIONS | 7 |
| 5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER | 7 |
| 6 TEST INSTRUMENTS LIST | 8 |
| 7 RADIO TECHNICAL SPECIFICATION IN ETSI EN 300 328 | 10 |
| 7.1 TEST ENVIRONMENT AND MODE | 10 |
| 7.2 TRANSMITTER REQUIREMENT | 11 |
| 7.2.1 RF Output Power | 11 |
| 7.2.2 Power Spectral Density | 15 |
| 7.2.3 Adaptivity | 21 |
| 7.2.4 Occupied Channel Bandwidth | 33 |
| 7.2.5 Transmitter unwanted emissions in the OOB domain | 39 |
| 7.2.6 Transmitter unwanted emissions in the spurious domain | 45 |
| 7.3 RECEIVER REQUIREMENT | 53 |
| 7.3.1 Spurious Emissions | 53 |
| 7.3.2 Receiver Blocking | 60 |
| 8 TEST SETUP PHOTO | 61 |
| 9 EUT CONSTRUCTIONAL DETAILS | 61 |

4 Test Summary

| Radio Spectrum Matter (RSM) Part of Tx | | | | | |
|---|------------------|-----------------|--|-------------|--------|
| Test | Test Requirement | Test method | Limit/Severity | Uncertainty | Result |
| RF Output Power | Clause 4.3.2.1 | Clause 5.3.2.2 | 20dBm | ±1.5dB | PASS |
| Power Spectral Density | Clause 4.3.2.2 | Clause 5.3.3.2 | 10dBm/MHz | ±3dB | PASS |
| Duty Cycle, Tx-sequence, Tx-gap | Clause 4.3.2.3 | Clause 5.3.2.2 | Clause 4.3.2.3.2 | ±5 % | N/A |
| Medium Utilisation (MU) factor | Clause 4.3.2.4 | Clause 5.3.2.2 | ≤ 10% | ±5 % | N/A |
| Adaptivity | Clause 4.3.2.5 | Clause 5.3.7.2 | Clause 4.3.2.5.1.2 & Clause 4.3.2.5.2.2 & Clause 4.3.2.5.3.2 | -- | PASS |
| Occupied Channel Bandwidth | Clause 4.3.2.6 | Clause 5.3.8.2 | Clause 4.3.2.6.2 | ±5 % | PASS |
| Transmitter unwanted emissions in the OOB domain | Clause 4.3.2.7 | Clause 5.3.9.2 | Clause 4.3.2.7.2 | ±3dB | PASS |
| Transmitter unwanted emissions in the spurious domain | Clause 4.3.2.8 | Clause 5.3.10.2 | Clause 4.3.2.8.2 | ±6dB | PASS |
| Radio Spectrum Matter (RSM) Part of Rx | | | | | |
| Receiver spurious emissions | Clause 4.3.2.9 | Clause 5.3.11.2 | Clause 4.3.2.9.2 | ±6dB | PASS |
| Receiver Blocking | Clause 4.3.2.10 | Clause 5.3.7.2 | Clause 4.3.2.10.2 | -- | PASS |

Remark:

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

Temperature (Uncertainty): ±1°C Humidity(Uncertainty): ±5%

Uncertainty: ± 3%(for DC and low frequency voltages)

5 General Information

5.1 Client Information

| | |
|-----------------------------------|---|
| Applicant: | Dragino Technology Co., Limited. |
| Address of Applicant: | Room 7009, Zi'An Commercial Building, Qian Jin 1 Road, Xin'An 6thDistrict, Baoan, Shenzhen, China |
| Manufacturer/ Factory: | Dragino Technology Co., Limited. |
| Address of Manufacturer/ Factory: | Room 7009, Zi'An Commercial Building, Qian Jin 1 Road, Xin'An 6thDistrict, Baoan, Shenzhen, China |

5.2 General Description of EUT

| | |
|--|--|
| Product Name: | Wireless Sensor Node / ATA |
| Model No.: | DT01, MP2.0 Phone, MP2.0 Basic, MS14-P, MS14-S, MS14-HEV |
| Operation Frequency: | 2412MHz~2472MHz(802.11b/802.11g/802.11n(H20)) 2422MHz~2462MHz(802.11n(H40)) |
| Channel numbers: | 13 for 802.11b/802.11g/802.11n(HT20) 9 for 802.11n(HT40) |
| Channel separation: | 5MHz |
| Modulation Technology: (IEEE 802.11b) | Direct Sequence Spread Spectrum(DSSS) |
| Modulation Technology: (IEEE 802.11g/802.11n) | Orthogonal Frequency Division Multiplexing(OFDM) |
| Antenna Type: | External antenna |
| Antenna gain: | 2dBi (declare by Applicant) |
| Power Supply: | Adapter: Model:F05W-120050SPAV Input:AC100-240V~50/60Hz, 190mA Output:DC 12V 0.5A |

| WIFI Operation Frequency each of channel | | | | | | | |
|--|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1 | 2412MHz | 5 | 2432MHz | 9 | 2452MHz | 13 | 2472MHz |
| 2 | 2417MHz | 6 | 2437MHz | 10 | 2457MHz | | |
| 3 | 2422MHz | 7 | 2442MHz | 11 | 2462MHz | | |
| 4 | 2427MHz | 8 | 2447MHz | 12 | 2467MHz | | |

The EUT operation in above frequency list, and used test software to control the EUT for staying in continuous transmitting and receiving mode. So test frequency is below:

| Test channel | Frequency (MHz) | |
|-----------------|-------------------------------|---------------|
| | 802.11b/802.11g/802.11n(HT20) | 802.11n(HT40) |
| Lowest channel | 2412MHz | 2422MHz |
| Middle channel | 2442MHz | 2442MHz |
| Highest channel | 2472MHz | 2462MHz |

5.3 Test mode

| | |
|-------------------|---|
| Transmitting mode | Keep the EUT in continuously transmitting mode. |
|-------------------|---|

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

| Mode | 802.11b | 802.11g | 802.11n(HT20) | 802.11n(HT40) |
|-----------|---------|---------|---------------|---------------|
| Data rate | 1Mbps | 6Mbps | 6.5Mbps | 13Mbps |

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

• **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China

Tel: 0755-27798480

Fax: 0755-27798960

5.6 Description of Support Units

The EUT has been tested as an independent unit.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.

6 Test Instruments List

| Radiated: | | | | | | |
|-----------|---------------------------------------|--------------------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | 3m Semi- Anechoic Chamber | ZhongYu Electron | 9.2(L)*6.2(W)* 6.4(H) | GTS250 | Mar. 28 2015 | Mar. 27 2016 |
| 2 | Control Room | ZhongYu Electron | 6.2(L)*2.5(W)* 2.4(H) | GTS251 | N/A | N/A |
| 3 | EMI Test Receiver | Rohde & Schwarz | ESU26 | GTS203 | June 30 2015 | June 29 2016 |
| 4 | BiConiLog Antenna | SCHWARZBECK MESS-ELEKTRONIK | VULB9163 | GTS214 | Feb. 22 2015 | Feb. 21 2016 |
| 5 | Double -ridged waveguide horn | SCHWARZBECK MESS-ELEKTRONIK | 9120D-829 | GTS208 | June 26 2015 | June 25 2016 |
| 6 | Horn Antenna | ETS-LINDGREN | 3160 | GTS217 | Mar. 27 2015 | Mar. 26 2016 |
| 7 | EMI Test Software | AUDIX | E3 | N/A | N/A | N/A |
| 8 | Coaxial Cable | GTS | N/A | GTS213 | Mar. 28 2015 | Mar. 27 2016 |
| 9 | Coaxial Cable | GTS | N/A | GTS211 | Mar. 28 2015 | Mar. 27 2016 |
| 10 | Coaxial cable | GTS | N/A | GTS210 | Mar. 28 2015 | Mar. 27 2016 |
| 11 | Coaxial Cable | GTS | N/A | GTS212 | Mar. 28 2015 | Mar. 27 2016 |
| 12 | Amplifier(100kHz-3GHz) | HP | 8347A | GTS204 | June 30 2015 | June 29 2016 |
| 13 | Amplifier(2GHz-20GHz) | HP | 8349B | GTS206 | June 30 2015 | June 29 2016 |
| 14 | Amplifier (18-26GHz) | Rohde & Schwarz | AFS33-18002 650-30-8P-44 | GTS218 | June 26 2015 | June 25 2016 |
| 15 | Band filter | Amindeon | 82346 | GTS219 | Mar. 28 2015 | Mar. 27 2016 |
| 16 | Constant temperature and humidity box | Oregon Scientific | BA-888 | GTS248 | May 09 2015 | May 08 2016 |
| 17 | D.C. Power Supply | Instek | PS-3030 | GTS232 | May 09 2015 | May 08 2016 |

| Conducted: | | | | | | |
|-------------------|--|---------------------|------------------|-------------------|--------------------------------|------------------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | Signal Analyzer | Agilent | N9010A | MY48030494 | Jan. 19 2015 | Jan. 18 2016 |
| 2 | vector Signal Generator | Agilent | E4438C | MY49070163 | Jan. 19 2015 | Jan. 18 2016 |
| 3 | splitter | Mini-Circuits | ZAP-50W | NN256400424 | Jan. 19 2015 | Jan. 18 2016 |
| 4 | Directional Coupler | Agilent | 87300C | MY44300299 | Jan. 19 2015 | Jan. 18 2016 |
| 5 | vector Signal Generator | Agilent | E4438C | US44271917 | Jan. 19 2015 | Jan. 18 2016 |
| 6 | X-series USB Peak and Average Power Sensor | Agilent | U2021XA | MY54080020 | Jan. 19 2015 | Jan. 18 2016 |
| 7 | X-series USB Peak and Average Power Sensor | Agilent | U2021XA | MY54110001 | Jan. 19 2015 | Jan. 18 2016 |
| 8 | X-series USB Peak and Average Power Sensor | Agilent | U2021XA | MY53480008 | Jan. 19 2015 | Jan. 18 2016 |
| 9 | X-series USB Peak and Average Power Sensor | Agilent | U2021XA | MY54080019 | Jan. 19 2015 | Jan. 18 2016 |
| 10 | 4 Ch.Simultaneous Sampling 14 Bits 2 MS/s | Agilent | U2531A | TW54063507 | Jan. 19 2015 | Jan. 18 2016 |
| 11 | 4 Ch.Simultaneous Sampling 14 Bits 2 MS/s | Agilent | U2531A | TW54063513 | Jan. 19 2015 | Jan. 18 2016 |
| 12 | splitter | Mini | PS3-7 | 4463 | Jan. 19 2015 | Jan. 18 2016 |

7 Radio Technical Specification in ETSI EN 300 328


7.1 Test Environment and Mode

| Test mode: | | | | | |
|-------------------------------|--|-------------------|---------|---------|---------|
| Transmitting mode: | Keep the EUT in transmitting mode with modulation. | | | | |
| Receiving mode | Keep the EUT in receiving mode. | | | | |
| Operating Environment: | | | | | |
| Item | Normal condition | Extreme condition | | | |
| | | HVHT | LVHT | HVLT | LVLТ |
| Temperature | +25°C | +55°C | +55°C | -20°C | -20°C |
| Voltage | DC 230V | DC 253V | DC 207V | DC 253V | DC 207V |
| Humidity | 20%-95% | | | | |
| Atmospheric Pressure: | 1008 mbar | | | | |

| Setting | Value |
|-------------------------------------|------------------|
| Modulation | Other |
| Adaptive | Yes |
| Number of Transmission Chains | 1 |
| Antenna Gain 1 | 2dBi |
| Beamforming Gain | 1.58dB |
| Nominal Channel Bandwidth | 20MHz/40MHz |
| Maximum EIRP | 17.32dBm |
| DUT Frequency not configurable | No |
| Frequency Low | 2412MHz/2422MHz |
| Frequency Mid | 2442MHz |
| Frequency High | 2472MHz/2462MHz |
| Attenuation/Pathloss File 1 | Attenuator Port1 |
| DUT Port Occupied Channel Bandwidth | 1 |
| LBT/DAA Based | Yes |
| DUT Port Adaptivity | 1 |
| Channel Occupation Time | 13ms |

7.2 Transmitter Requirement

7.2.1 RF Output Power
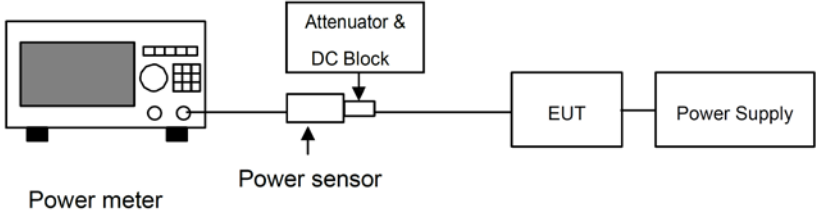
| | |
|-------------------|--|
| Test Requirement: | ETSI EN 300 328 clause 4.3.2.1 |
| Test Method: | ETSI EN 300 328 clause 5.3.2.2.1.1 |
| Limit: | 20dBm |
| Test setup: |  <p>The diagram shows a signal path starting from a Power meter on the left. A line connects it to a Power sensor. Above the Power sensor is a box labeled 'Attenuator & DC Block' with an arrow pointing down to the sensor. A line continues from the Power sensor to a box labeled 'EUT'. Finally, a line connects the EUT to a box labeled 'Power Supply' on the right.</p> |
| Test procedure: | <p>Step 1: Use a fast power sensor suitable for 2,4 GHz and capable of 1 MS/s. Use the following settings:</p> <ul style="list-style-type: none"> - Sample speed 1 MS/s or faster. - The samples must represent the power of the signal. - Measurement duration: For non-adaptive equipment: equal to the observation period defined in clauses 4.3.1.2.1 or 4.3.2.3.1. For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) are captured. <p>NOTE 1: For adaptive equipment, to increase the measurement accuracy, a higher number of bursts may be used.</p> <p>Step 2: For conducted measurements on devices with one transmit chain: -Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.</p> <p>For conducted measurements on devices with multiple transmit chains: -Connect one power sensor to each transmit port for a synchronous measurement on all transmit ports. -Trigger the power sensors so that they start sampling at the same time. Make sure the time difference between the samples of all sensors is less than half the time between two samples. -For each instant in time, sum the power of the individual samples of all ports and store them. Use these stored samples in all following steps.</p> <p>Step 3: Find the start and stop times of each burst in the stored measurement samples.</p> <p>NOTE 2: The start and stop times are defined as the points where the power is at least 20 dB below the RMS burst power calculated in step 4.</p> <p>Step 4: Between the start and stop times of each individual burst calculate the</p> |

| | |
|---------------------|--|
| | <p>RMS power over the burst. Save these Pburst values, as well as the start and stop times for each burst.</p> <p>Step 5: The highest of all Pburst values (value "A" in dBm) will be used for maximum e.i.r.p. calculations.</p> <p>Step 6: Add the (stated) antenna assembly gain "G" in dBi of the individual antenna. If applicable, add the additional beamforming gain "Y" in dB. If more than one antenna assembly is intended for this power setting, the maximum overall antenna gain (G or G + Y) shall be used. The RF Output Power (P) shall be calculated using the formula below: $P = A + G + Y$</p> |
| Measurement Record: | Uncertainty: $\pm 1.5\text{dB}$ |
| Test Instruments: | See section 6.0 |
| Test mode: | Transmitting mode |


Measurement Data

| 802.11b mode | | | | | | |
|-----------------|---------|-----------------------|-------------------|------------------------|-------------|--------|
| Test conditions | Channel | Burst RMS power (dBm) | Antenna Gain(dBi) | Calculated Power (dBm) | Limit (dBm) | Result |
| Normal | Lowest | 15.22 | 2.00 | 17.22 | 20 | Pass |
| | Middle | 15.75 | 2.00 | 17.75 | | |
| | Highest | 15.96 | 2.00 | 17.96 | | |
| LVHT | Lowest | 15.15 | 2.00 | 17.15 | | |
| | Middle | 15.65 | 2.00 | 17.65 | | |
| | Highest | 15.86 | 2.00 | 17.86 | | |
| LVLT | Lowest | 15.20 | 2.00 | 17.20 | | |
| | Middle | 15.73 | 2.00 | 17.73 | | |
| | Highest | 15.94 | 2.00 | 17.94 | | |
| HVHT | Lowest | 15.21 | 2.00 | 17.21 | | |
| | Middle | 15.74 | 2.00 | 17.74 | | |
| | Highest | 15.95 | 2.00 | 17.95 | | |
| HVLT | Lowest | 15.16 | 2.00 | 17.16 | | |
| | Middle | 15.69 | 2.00 | 17.69 | | |
| | Highest | 15.89 | 2.00 | 17.89 | | |
| 802.11g mode | | | | | | |
| Test conditions | Channel | Burst RMS power (dBm) | Antenna Gain(dBi) | Calculated Power (dBm) | Limit (dBm) | Result |
| Normal | Lowest | 11.41 | 2.00 | 13.41 | 20 | Pass |
| | Middle | 11.72 | 2.00 | 13.72 | | |
| | Highest | 11.96 | 2.00 | 13.96 | | |
| LVHT | Lowest | 11.34 | 2.00 | 13.34 | | |
| | Middle | 11.62 | 2.00 | 13.62 | | |
| | Highest | 11.86 | 2.00 | 13.86 | | |
| LVLT | Lowest | 11.39 | 2.00 | 13.39 | | |
| | Middle | 11.70 | 2.00 | 13.70 | | |
| | Highest | 11.94 | 2.00 | 13.94 | | |
| HVHT | Lowest | 11.40 | 2.00 | 13.40 | | |
| | Middle | 11.71 | 2.00 | 13.71 | | |
| | Highest | 11.95 | 2.00 | 13.95 | | |
| HVLT | Lowest | 11.35 | 2.00 | 13.35 | | |
| | Middle | 11.66 | 2.00 | 13.66 | | |
| | Highest | 11.89 | 2.00 | 13.89 | | |

| 802.11n(HT20) mode | | | | | | |
|--------------------|---------|-----------------------|-------------------|------------------------|-------------|--------|
| Test conditions | Channel | Burst RMS power (dBm) | Antenna Gain(dBi) | Calculated Power (dBm) | Limit (dBm) | Result |
| Normal | Lowest | 12.08 | 2.00 | 14.08 | 20 | Pass |
| | Middle | 11.59 | 2.00 | 13.59 | | |
| | Highest | 12.14 | 2.00 | 14.14 | | |
| LVHT | Lowest | 12.01 | 2.00 | 14.01 | | |
| | Middle | 11.49 | 2.00 | 13.49 | | |
| | Highest | 12.04 | 2.00 | 14.04 | | |
| LVLТ | Lowest | 12.06 | 2.00 | 14.06 | | |
| | Middle | 11.57 | 2.00 | 13.57 | | |
| | Highest | 12.12 | 2.00 | 14.12 | | |
| HVHT | Lowest | 12.07 | 2.00 | 14.07 | | |
| | Middle | 11.58 | 2.00 | 13.58 | | |
| | Highest | 12.13 | 2.00 | 14.13 | | |
| HVLT | Lowest | 12.02 | 2.00 | 14.02 | | |
| | Middle | 11.53 | 2.00 | 13.53 | | |
| | Highest | 12.07 | 2.00 | 14.07 | | |
| 802.11n(HT40) mode | | | | | | |
| Test conditions | Channel | Burst RMS power (dBm) | Antenna Gain(dBi) | Calculated Power (dBm) | Limit (dBm) | Result |
| Normal | Lowest | 10.81 | 2.00 | 12.81 | 20 | Pass |
| | Middle | 10.40 | 2.00 | 12.40 | | |
| | Highest | 10.55 | 2.00 | 12.55 | | |
| LVHT | Lowest | 10.74 | 2.00 | 12.74 | | |
| | Middle | 10.30 | 2.00 | 12.30 | | |
| | Highest | 10.45 | 2.00 | 12.45 | | |
| LVLТ | Lowest | 10.79 | 2.00 | 12.79 | | |
| | Middle | 10.38 | 2.00 | 12.38 | | |
| | Highest | 10.53 | 2.00 | 12.53 | | |
| HVHT | Lowest | 10.80 | 2.00 | 12.80 | | |
| | Middle | 10.39 | 2.00 | 12.39 | | |
| | Highest | 10.54 | 2.00 | 12.54 | | |
| HVLT | Lowest | 10.75 | 2.00 | 12.75 | | |
| | Middle | 10.34 | 2.00 | 12.34 | | |
| | Highest | 10.48 | 2.00 | 12.48 | | |

Remark:1>. Volt= Voltage, Temp= Temperature
 2>. Duty cycle=100%, Antenna Gain=2dBi

7.2.2 Power Spectral Density
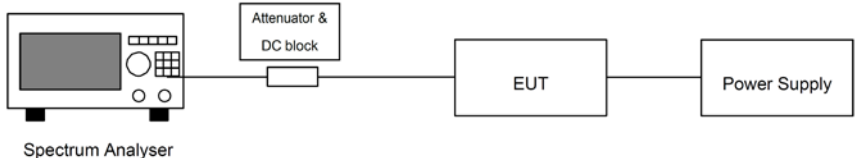
| | |
|-------------------|---|
| Test Requirement: | ETSI EN 300 328 clause 4.3.2.2 |
| Test Method: | ETSI EN 300 328 clause 5.3.3.2.1 |
| Limit: | 10dBm/MHz |
| Test setup: |  <pre> graph LR SA[Spectrum Analyser] --- A[Attenuator & DC block] A --- EUT[EUT] EUT --- PS[Power Supply] </pre> |
| Test procedure: | <p>Step 1: Connect the UUT to the spectrum analyser and use the following settings:</p> <p>Start Frequency: 2400 MHz Stop Frequency: 2483.5 MHz Resolution BW: 10 kHz Video BW: 30 kHz Sweep Points: > 8350</p> <p>NOTE:For spectrum analysers not supporting this number of sweep points, the frequency band may be segmented.</p> <p>Detector: RMS Trace Mode: Max Hold Sweep time: Auto</p> <p>For non-continuous signals, wait for the trace to be completed. Save the (trace) data set to a file.</p> <p>Step 2: For conducted measurements on smart antenna systems using either operating mode 2 or 3 (see clause 5.1.3.2), repeat the measurement for each of the transmit ports. For each frequency point, add up the amplitude (power) values for the different transmit chains and use this as the new data set.</p> <p>Step 3: Add up the values for amplitude (power) for all the samples in the file.</p> <p>Step 4: Normalize the individual values for amplitude so that the sum is equal to the RF Output Power (e.i.r.p.) measured in clause 5.3.2.</p> <p>Step 5: Starting from the first sample in the file (lowest frequency), add up the power of the following samples representing a 1 MHz segment and record the results for power and position (i.e. sample #1 to #100). This is the Power Spectral Density (e.i.r.p.) for the first 1 MHz segment which shall be recorded.</p> <p>Step 6: Shift the start point of the samples added up in step 5 by 1 sample and repeat the procedure in step 5 (i.e. sample #2 to</p> |


| | |
|---------------------|---|
| | #101). Step 7: Repeat step 6 until the end of the data set and record the radiated Power Spectral Density values for each of the 1 MHz segments. |
| Measurement Record: | Uncertainty: $\pm 3\text{dB}$ |
| Test Instruments: | See section 6.0 |
| Test mode: | Transmitting mode |

Measurement Data


| 802.11b mode | | | |
|-------------------|----------------------------------|-----------------|--------|
| Channel | Power Spectral Density (dBm/MHz) | Limit (dBm/MHz) | Result |
| CH 1 | 8.63 | 10.00 | Pass |
| CH 7 | 8.95 | | |
| CH 13 | 8.34 | | |
| 802.11g mode | | | |
| Channel | Power Spectral Density (dBm/MHz) | Limit (dBm/MHz) | Result |
| CH 1 | 3.02 | 10.00 | Pass |
| CH 7 | 3.84 | | |
| CH 13 | 3.19 | | |
| 802.11n-HT20 mode | | | |
| Channel | Power Spectral Density (dBm/MHz) | Limit (dBm/MHz) | Result |
| CH 1 | 2.19 | 10.00 | Pass |
| CH 7 | 2.13 | | |
| CH 13 | 1.89 | | |
| 802.11n-HT40 mode | | | |
| Channel | Power Spectral Density (dBm/MHz) | Limit (dBm/MHz) | Result |
| CH 3 | -1.42 | 10.00 | Pass |
| CH 7 | -1.52 | | |
| CH 11 | -1.36 | | |

Test plots are followed:


802.11b mode

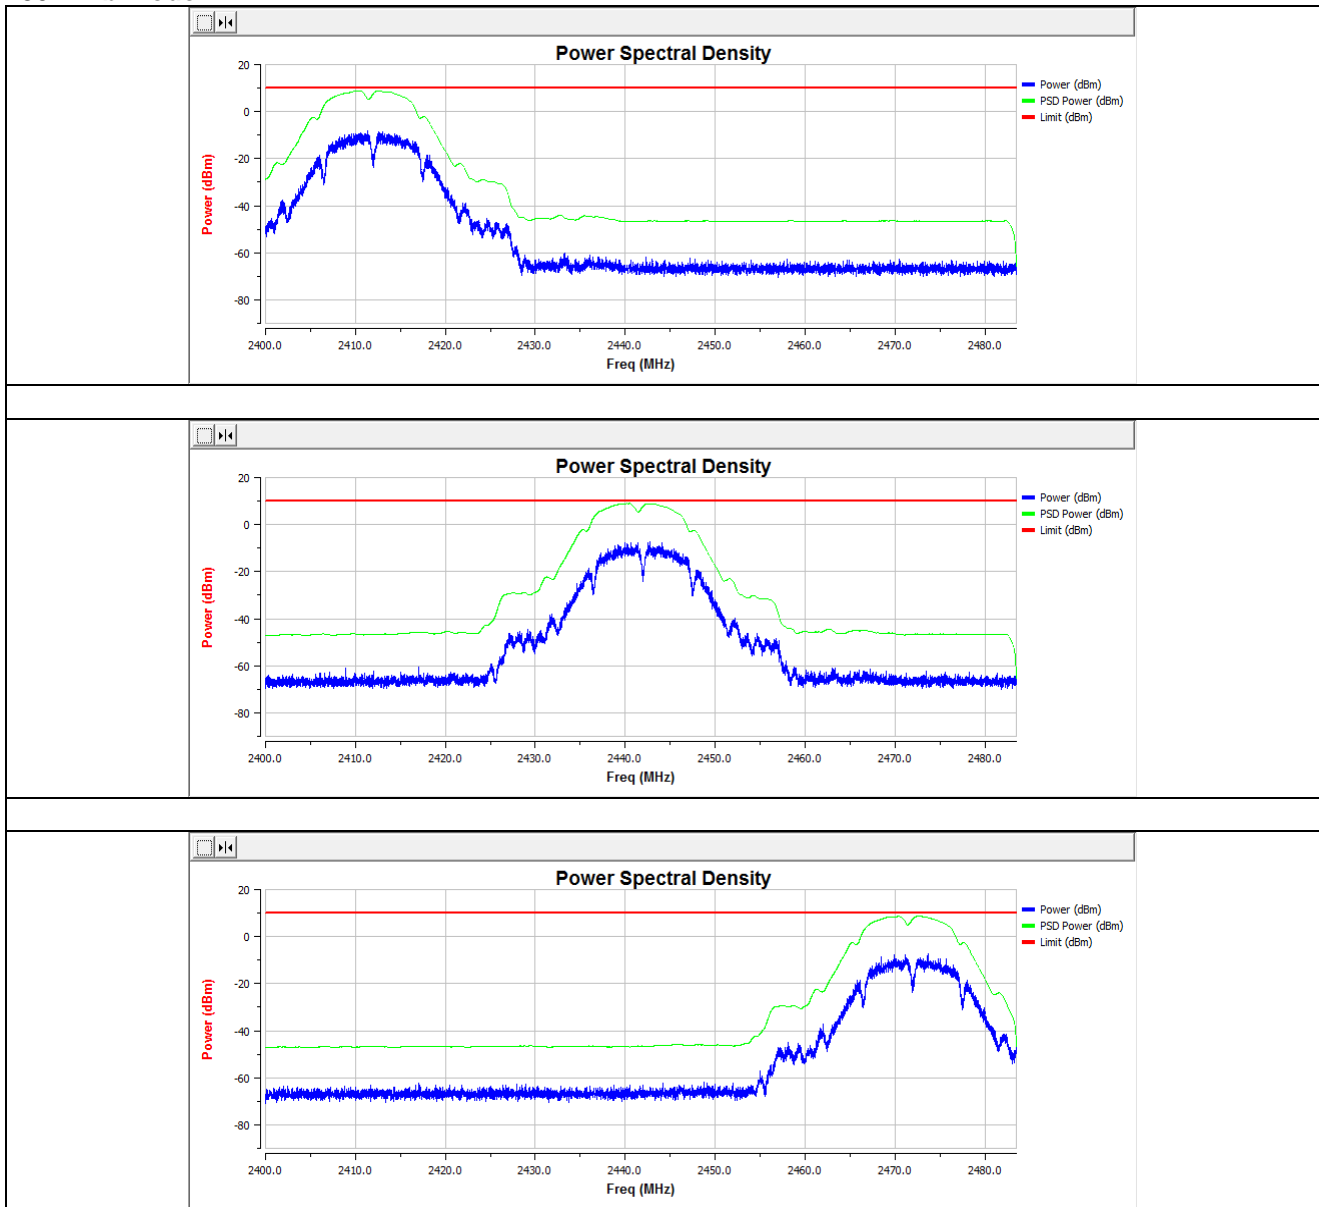


802.11g mode

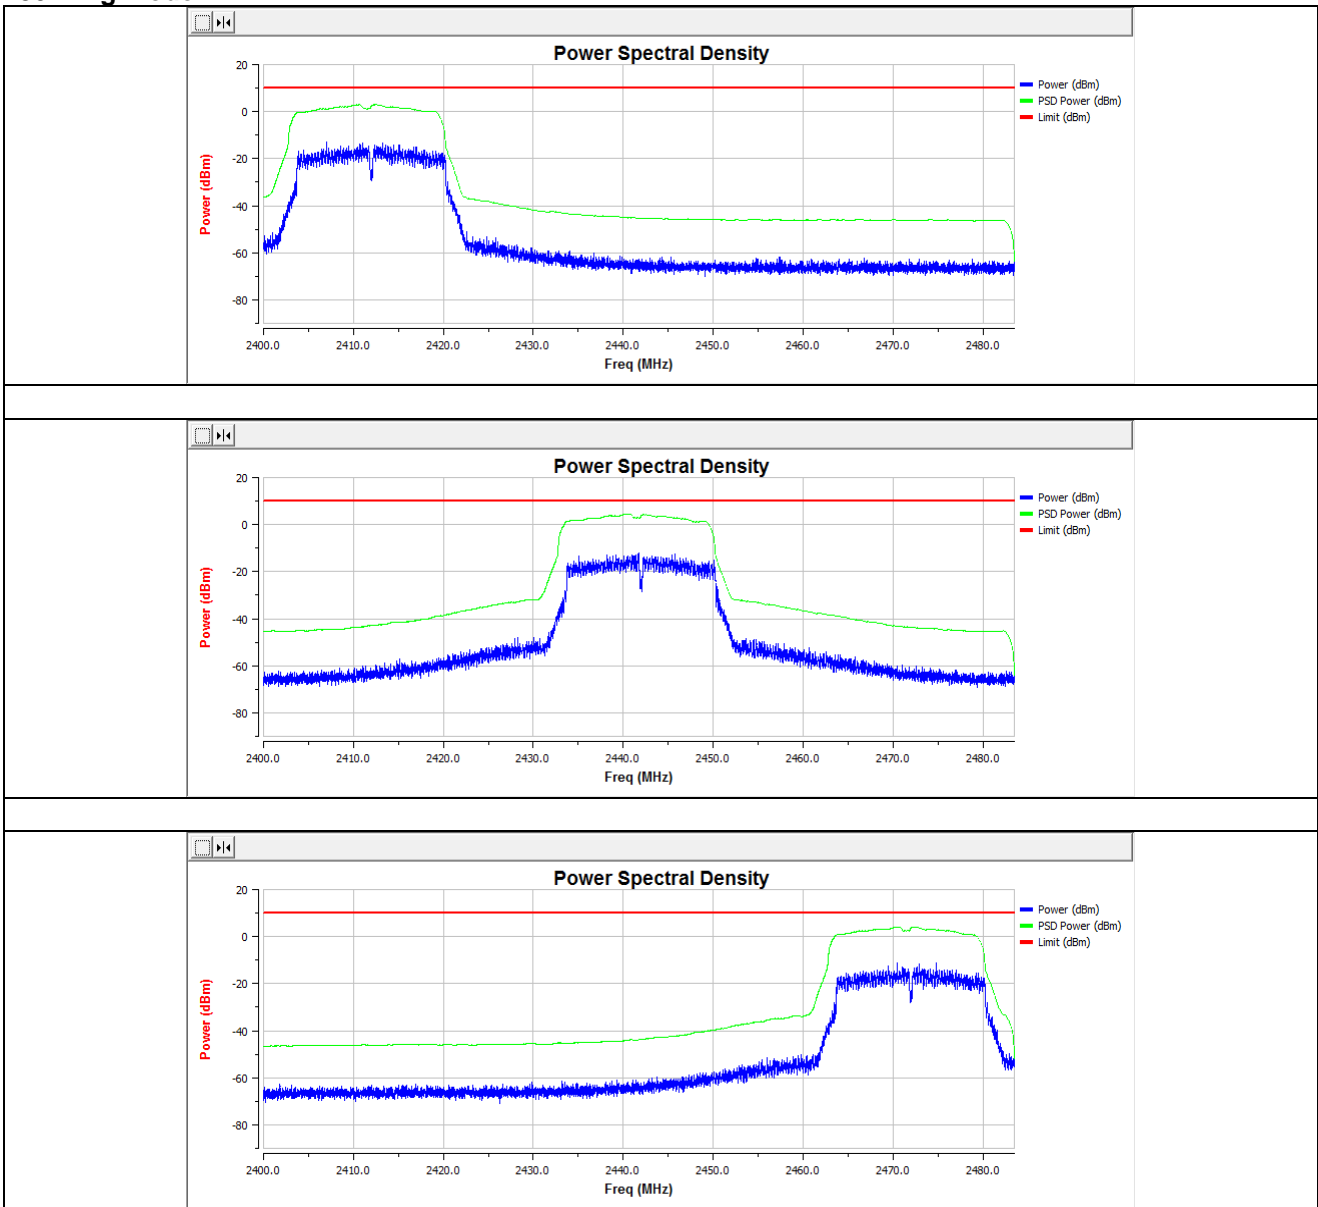

802.11n-HT20 mode

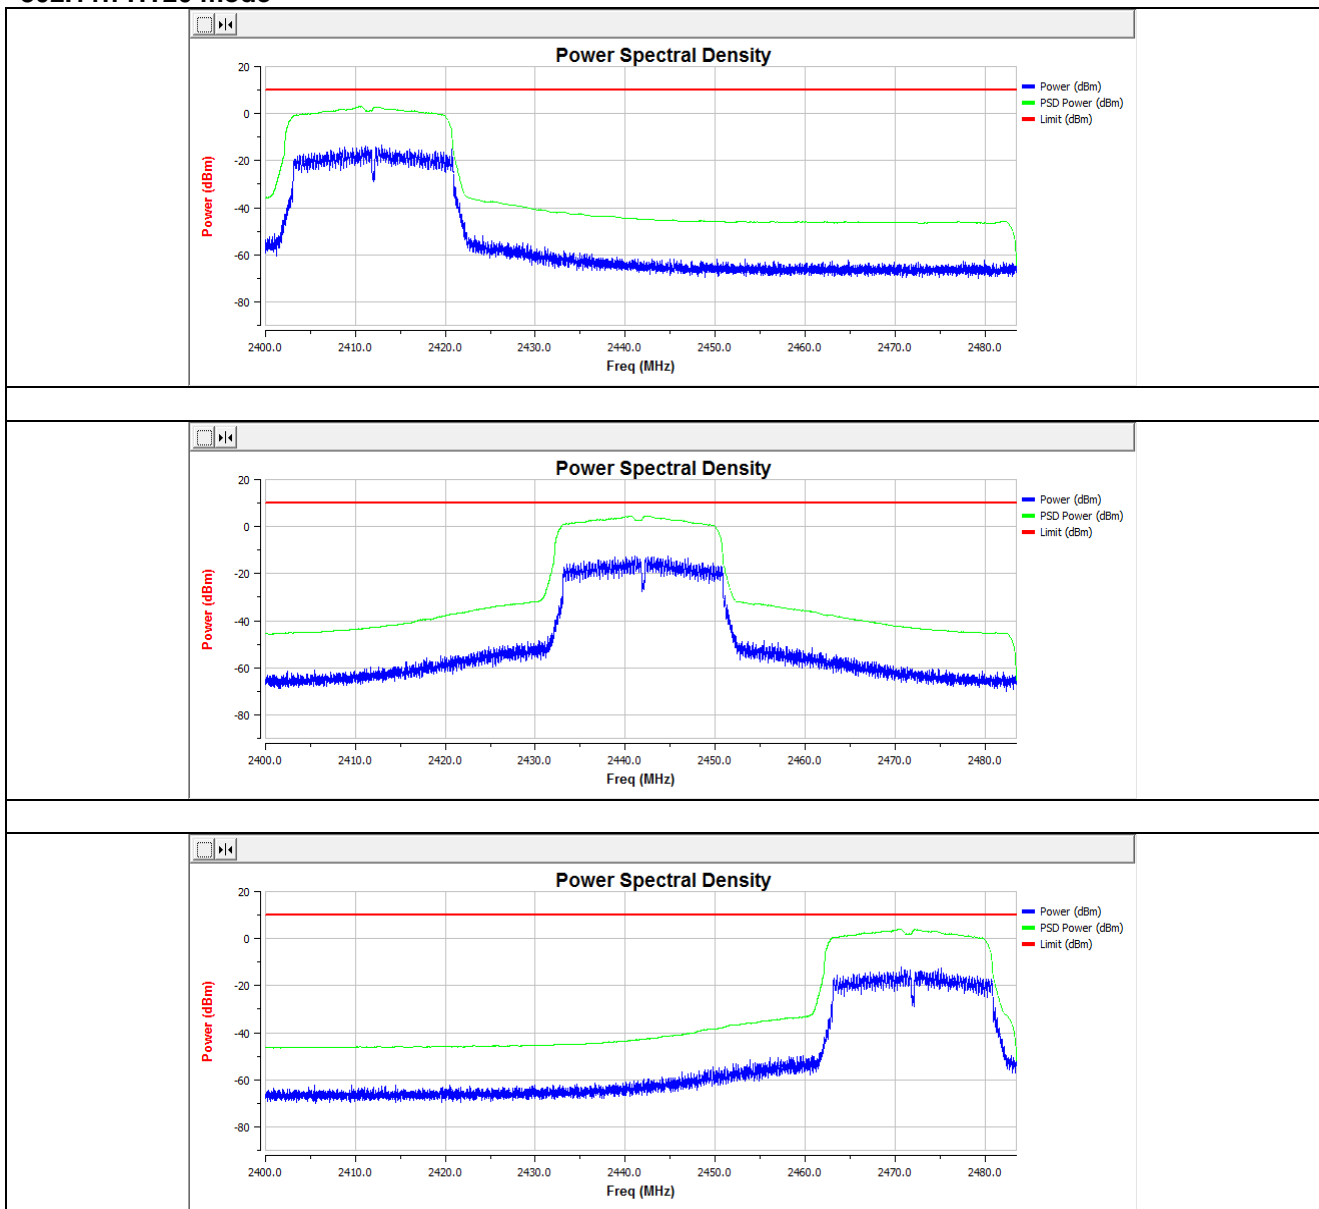

802.11n-HT40 mode

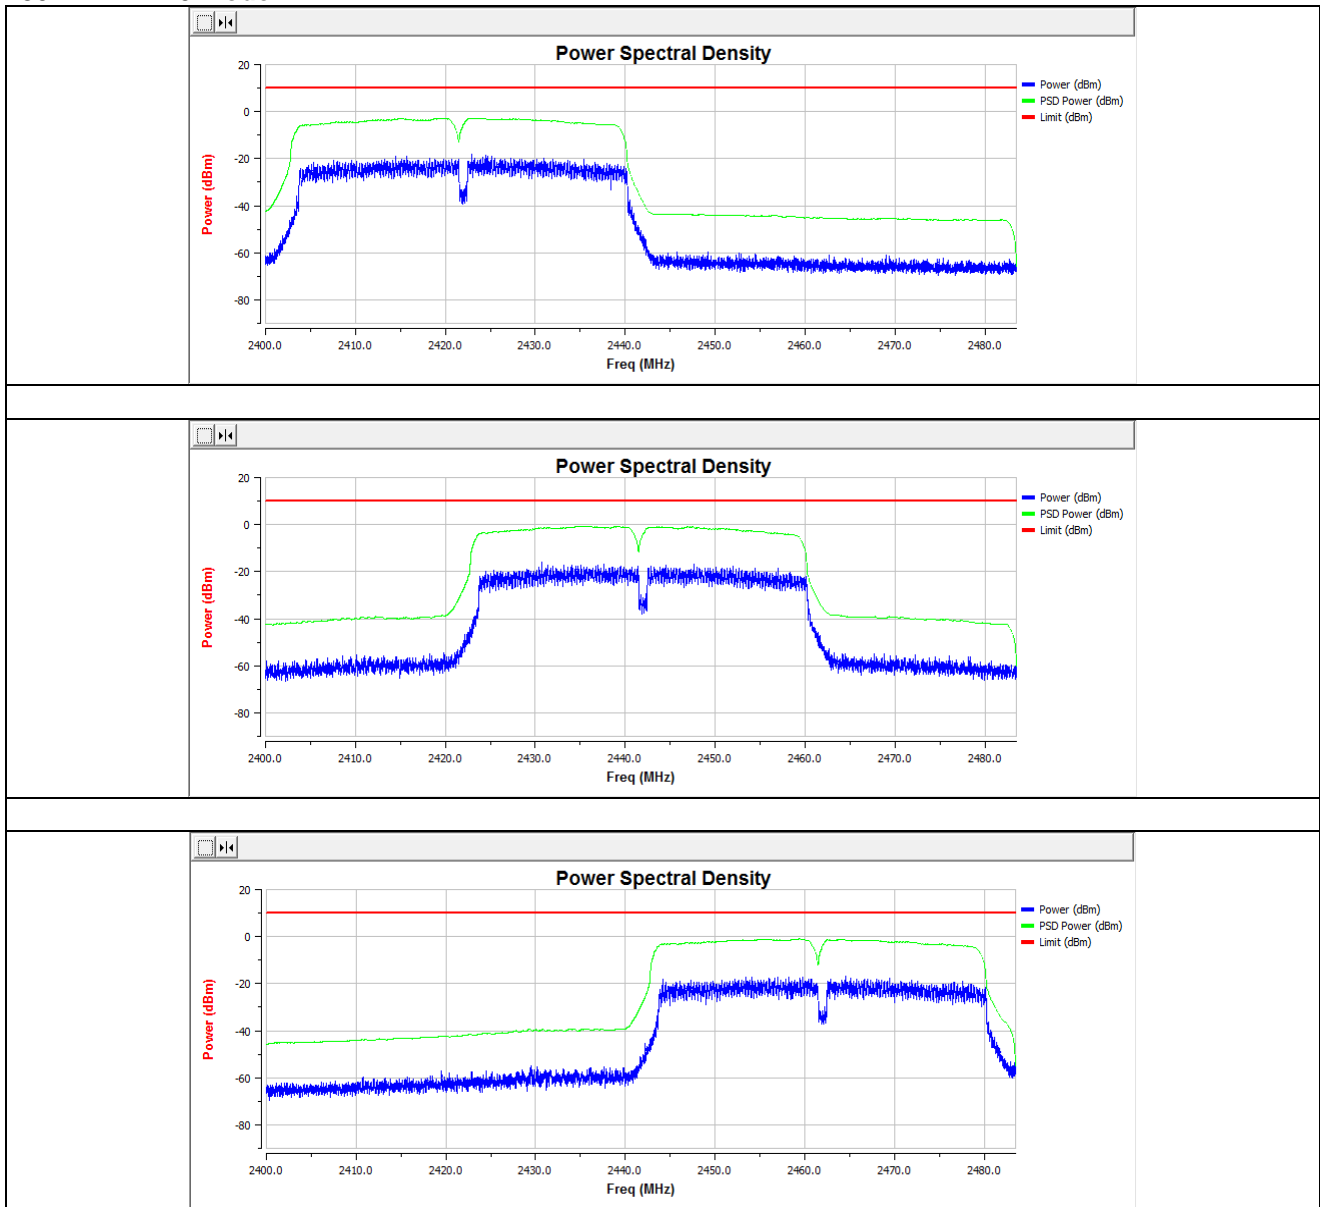

7.2.3 Adaptivity

| | | | | | | | | | | | | | |
|-------------------|--|------|--|--------------|----------------|------|-------|----------------|-----|-------------------|---|-------|-----|
| Test Requirement: | ETSI EN 300 328 clause 4.3.2.5 | | | | | | | | | | | | |
| Test Method: | ETSI EN 300 328 clause 5.3.7.2.1 | | | | | | | | | | | | |
| Limit: | Clause 4.3.2.5.1.2 & Clause 4.3.2.5.2.2 & Clause 4.3.2.5.3.2 | | | | | | | | | | | | |
| Test setup: | | | | | | | | | | | | | |
| Test procedure: | <p>1. Adaptive Frequency Hopping equipment using DAA</p> <p>The different steps below define the procedure to verify the efficiency of the DAA based adaptive mechanisms for frequency hopping equipment. These mechanisms are described in clause 4.3.1.6.</p> <p>Step 1:</p> <p>The UUT may connect to a companion device during the test. The interference signal generator, the blocking signal generator, the spectrum analyser, the UUT and the companion device are connected using a set-up equivalent to the example given by figure 5, although the interference and blocking signal generators do not generate any signals at this point in time. The spectrum analyser is used to monitor the transmissions of the UUT in response to the interfering and the blocking signals.</p> <p>For the hopping frequency to be tested, adjust the received signal level (wanted signal from the companion device) at the UUT to the value defined in table 3 (clause 4).</p> <p>NOTE 1: Testing of Unidirectional equipment does not require a link to be established with a companion device.</p> <p>The analyzer shall be set as follows:</p> <table> <tr> <td>RBW:</td> <td>≥ Occupied Channel Bandwidth (use next available RBW setting above the Occupied Channel Bandwidth)</td> </tr> <tr> <td>Filter type:</td> <td>Channel Filter</td> </tr> <tr> <td>VBW:</td> <td>≥ RBW</td> </tr> <tr> <td>Detector Mode:</td> <td>RMS</td> </tr> <tr> <td>Centre Frequency:</td> <td>Equal to the hopping frequency to be tested</td> </tr> <tr> <td>Span:</td> <td>0Hz</td> </tr> </table> | RBW: | ≥ Occupied Channel Bandwidth (use next available RBW setting above the Occupied Channel Bandwidth) | Filter type: | Channel Filter | VBW: | ≥ RBW | Detector Mode: | RMS | Centre Frequency: | Equal to the hopping frequency to be tested | Span: | 0Hz |
| RBW: | ≥ Occupied Channel Bandwidth (use next available RBW setting above the Occupied Channel Bandwidth) | | | | | | | | | | | | |
| Filter type: | Channel Filter | | | | | | | | | | | | |
| VBW: | ≥ RBW | | | | | | | | | | | | |
| Detector Mode: | RMS | | | | | | | | | | | | |
| Centre Frequency: | Equal to the hopping frequency to be tested | | | | | | | | | | | | |
| Span: | 0Hz | | | | | | | | | | | | |

| | |
|--|--|
| | <p>Sweep time: Channel Occupancy Time of the UUT. If the Channel Occupancy Time is non-contiguous (non-LBT based equipment), the sweep time shall be sufficient to cover the period over which the Channel Occupancy Time is spread out.</p> <p>Trace Mode: Clear/Write</p> <p>Trigger Mode: Video</p> <p>Step 2:</p> <p>Configure the UUT for normal transmissions with a sufficiently high payload to allow demonstration of compliance of the adaptive mechanism on the hopping frequency being tested.</p> <p>Using the procedure defined in clause 5.3.7.2.1.4, it shall be verified that, for systems with a dwell time greater than the maximum allowable Channel Occupancy Time, the UUT complies with the maximum Channel Occupancy Time and minimum Idle Period defined in clauses 4.3.1.6.1.2 and 4.3.1.6.2.2.</p> <p>Step 3: Adding the interference signal</p> <p>A 100 % duty cycle interference signal is injected centred on the hopping frequency being tested. This interference signal shall be a band limited noise signal which has a flat Power Spectral Density, and shall have a bandwidth greater than the Occupied Channel Bandwidth of the UUT. The maximum ripple of this interfering signal shall be $\pm 1,5$ dB within the Occupied Channel Bandwidth and the Power Spectral Density (at the input of the UUT) shall be as defined in clauses 4.3.1.6.1.2 or 4.3.1.6.2.2.</p> <p>Step 4: Verification of reaction to the interference signal</p> <p>The spectrum analyser shall be used to monitor the transmissions of the UUT on the selected hopping frequency with the interfering signal injected. This may require the spectrum analyser sweep to be triggered by the start of the interfering signal.</p> <p>Using the procedure defined in clause 5.3.7.2.1.4, it shall be verified that:</p> <p>i) The UUT shall stop transmissions on the hopping frequency being tested.</p> <p>NOTE 2: The UUT is assumed to stop transmissions on this hopping frequency within a period equal to the maximum Channel Occupancy Time defined in clauses 4.3.1.6.1 or 4.3.1.6.2. As stated in clause 4.3.1.6.2.2, the Channel Occupancy Time for non-LBT based frequency hopping systems may be non-contiguous.</p> <p>ii) For LBT based frequency hopping equipment, apart from Short Control Signalling Transmissions (see below), there shall be no subsequent transmissions on this hopping frequency, as long as the interference signal remains present.</p> <p>For non-LBT based frequency hopping equipment, apart from Short Control Signalling Transmissions (see iii) below), there shall be no subsequent transmissions on this hopping frequency for a (silent) period defined in clause 4.3.1.6.2.2 step 3. After that, the UUT may have normal transmissions again for the duration of a single Channel Occupancy Time period (which may be non-contiguous). Because the interference signal is still present, another silent period as defined in</p> |
|--|--|

| | |
|--|---|
| | <p>clause 4.3.1.6.2.2 step 3 needs to be included. This sequence is repeated as long as the interfering signal is present.</p> <p>NOTE 3: In case of overlapping channels, transmissions in adjacent channels may generate transmission bursts on the channel being investigated, however they will have a lower amplitude as on-channel transmissions. Care should be taken to only evaluate the on-channel transmissions. The Time Domain Power Option of the analyser may be used to measure the RMS power of the individual bursts to distinguish on-channel transmissions from transmissions on adjacent channels. In some cases, the RBW may need to be reduced.</p> <p>iii) The UUT may continue to have Short Control Signalling Transmissions on the hopping frequency being tested while the interference signal is present. These transmissions shall comply with the limits defined in clause 4.3.1.6.3.2.</p> <p>NOTE 4: The verification of the Short Control Signalling transmissions may require the analyser settings to be changed (e.g. sweep time).</p> <p>iv) Alternatively, the equipment may switch to a non-adaptive mode.</p> <p>Step 5: Adding the blocking signal</p> <p>With the interfering signal present, a 100 % duty cycle CW signal is inserted as the blocking signal. The frequency and the level are provided in table 3 of clause 4.3.1.10.2.</p> <p>Repeat step 4 to verify that the UUT does not resume any normal transmissions on the hopping frequency being investigated.</p> <p>Step 6: Removing the interference and blocking signal</p> <p>On removal of the interference and blocking signal, the UUT is allowed to re-include any channel previously marked as unavailable; however, for non-LBT based systems, it shall be verified that this shall only be done after the period defined in clause 4.3.1.6.2.2 point 3.</p> <p>Step 7:</p> <p>The steps 2 to 6 shall be repeated for each of the hopping frequencies to be tested.</p> <p>2. Non-LBT based adaptive equipment using modulations other than FHSS</p> <p>The different steps below define the procedure to verify the efficiency of the non-LBT based DAA adaptive mechanism of equipment using wide band modulations other than FHSS.</p> <p>Step 1:</p> <p>The UUT may connect to a companion device during the test. The interference signal generator, the blocking signal generator, the spectrum analyser, the UUT and the companion device are connected using a set-up equivalent to the example given by figure 5 although the interference and blocking signal generator do not generate any signals at this point in time. The spectrum analyser is used to monitor the transmissions of the UUT in response to the interfering and the blocking signals.</p> <p>Adjust the received signal level (wanted signal from the companion device) at the UUT to the value defined in table 6 (clause 4).</p> <p>NOTE 1: Testing of Unidirectional equipment does not require a link to be established with a companion device.</p> |
|--|---|

| | |
|--|---|
| | <p>The analyzer shall be set as follows:</p> <p>RBW: \geq Occupied Channel Bandwidth (if the analyser does not support this setting, the highest available setting shall be used)</p> <p>VBW: $3 \times$ RBW (if the analyser does not support this setting, the highest available setting shall be used)</p> <p>Detector Mode: RMS</p> <p>Centre Frequency: Equal to the hopping frequency to be tested</p> <p>Span: 0Hz</p> <p>Sweep time: $>$ Channel Occupancy Time of the UUT</p> <p>Trace Mode: Clear/Write</p> <p>Trigger Mode: Video</p> <p>Step 2:</p> <p>Configure the UUT for normal transmissions with a sufficiently high payload to allow demonstration of compliance of the adaptive mechanism on the channel being tested.</p> <p>Using the procedure defined in clause 5.3.7.2.1.4, it shall be verified that the UUT complies with the maximum Channel Occupancy Time and minimum Idle Period defined in clause 4.3.2.5.1.2.</p> <p>Step 3: Adding the interference signal</p> <p>A 100 % duty cycle interference signal is injected on the current operating channel of the UUT. This interference signal shall be a band limited noise signal which has a flat power spectral density, and shall have a bandwidth greater than the Occupied Channel Bandwidth of the UUT. The maximum ripple of this interfering signal shall be $\pm 1,5$ dB within the Occupied Channel Bandwidth and the power spectral density (at the input of the UUT) shall be as defined in clause 4.3.2.5.1.2.</p> <p>Step 4: Verification of reaction to the interference signal</p> <p>The spectrum analyser shall be used to monitor the transmissions of the UUT on the selected operating channel with the interfering signal injected. This may require the spectrum analyser sweep to be triggered by the start of the interfering signal.</p> <p>Using the procedure defined in clause 5.3.7.2.1.4, it shall be verified that:</p> <p>i) The UUT shall stop transmissions on the current operating channel being tested.</p> <p>NOTE 2: The UUT is assumed to stop transmissions within a period equal to the maximum Channel Occupancy Time defined in clause 4.3.2.5.1.2 step 3.</p> <p>ii) Apart from Short Control Signalling Transmissions (see iii) below), there shall be no subsequent transmissions on this operating channel for a (silent) period defined in clause 4.3.2.5.1.2 step 2. After that, the UUT may have normal transmissions again for the duration of a single Channel Occupancy Time period. Because the interference signal is still present, another silent period as defined in clause 4.3.2.5.1.2 step 2 needs to be included. This sequence is repeated as long as the interfering signal is present.</p> <p>iii) The UUT may continue to have Short Control Signalling</p> |
|--|---|

| | | | | | | | | | | | | | |
|-------------------|---|------|---|------|--|----------------|-----|-------------------|---|-------|-----|-------------|----------------------------------|
| | <p>Transmissions on the operating channel while the interference signal is present. These transmissions shall comply with the limits defined in clause 4.3.2.5.3.2.</p> <p>NOTE 3: The verification of the Short Control Signalling transmissions may require the analyser settings to be changed (e.g. sweep time).</p> <p>iv) Alternatively, the equipment may switch to a non-adaptive mode.</p> <p>Step 5: Adding the blocking signal</p> <p>With the interfering signal present, a 100 % duty cycle CW signal is inserted as the blocking signal. The frequency and the level are provided in table 6 of clause 4.3.2.10.2.</p> <p>Repeat step 4 to verify that the UUT does not resume any normal transmissions.</p> <p>Step 6: Removing the interference and blocking signal</p> <p>On removal of the interference and blocking signal the UUT is allowed to start transmissions again on this channel however, it shall be verified that this shall only be done after the period defined in clause 4.3.2.5.1.2 step 2.</p> <p>Step 7:</p> <p>The steps 2 to 6 shall be repeated for each of the frequencies to be tested.</p> <p>3. LBT based adaptive equipment using modulations other than FHSS</p> <p>The different steps below define the procedure to verify the efficiency of the LBT based adaptive mechanism of equipment using wide band modulations other than FHSS. This method can be applied on Load Based Equipment and Frame Based Equipment.</p> <p>Step 1:</p> <p>The UUT may connect to a companion device during the test. The interference signal generator, the blocking signal generator, the spectrum analyser, the UUT and the companion device are connected using a set-up equivalent to the example given by figure 5 although the interference and blocking signal generator do not generate any signals at this point in time. The spectrum analyser is used to monitor the transmissions of the UUT in response to the interfering and the blocking signals.</p> <p>Adjust the received signal level (wanted signal from the companion device) at the UUT to the value defined in table 6 (clause 4).</p> <p>NOTE 1: Testing of Unidirectional equipment does not require a link to be established with a companion device.</p> <p>The analyzer shall be set as follows:</p> <table style="margin-left: 40px;"> <tr> <td>RBW:</td> <td>≥ Occupied Channel Bandwidth (if the analyser does not support this setting, the highest available setting shall be used)</td> </tr> <tr> <td>VBW:</td> <td>3 × RBW (if the analyser does not support this setting, the highest available setting shall be used)</td> </tr> <tr> <td>Detector Mode:</td> <td>RMS</td> </tr> <tr> <td>Centre Frequency:</td> <td>Equal to the hopping frequency to be tested</td> </tr> <tr> <td>Span:</td> <td>0Hz</td> </tr> <tr> <td>Sweep time:</td> <td>> maximum Channel Occupancy Time</td> </tr> </table> | RBW: | ≥ Occupied Channel Bandwidth (if the analyser does not support this setting, the highest available setting shall be used) | VBW: | 3 × RBW (if the analyser does not support this setting, the highest available setting shall be used) | Detector Mode: | RMS | Centre Frequency: | Equal to the hopping frequency to be tested | Span: | 0Hz | Sweep time: | > maximum Channel Occupancy Time |
| RBW: | ≥ Occupied Channel Bandwidth (if the analyser does not support this setting, the highest available setting shall be used) | | | | | | | | | | | | |
| VBW: | 3 × RBW (if the analyser does not support this setting, the highest available setting shall be used) | | | | | | | | | | | | |
| Detector Mode: | RMS | | | | | | | | | | | | |
| Centre Frequency: | Equal to the hopping frequency to be tested | | | | | | | | | | | | |
| Span: | 0Hz | | | | | | | | | | | | |
| Sweep time: | > maximum Channel Occupancy Time | | | | | | | | | | | | |

| | |
|--|---|
| | <p>Trace Mode: Clear/Write Trigger Mode: Video</p> <p>Step 2: Configure the UUT for normal transmissions with a sufficiently high payload to allow demonstration of compliance of the adaptive mechanism on the channel being tested.</p> <p>For Frame Based Equipment, using the procedure defined in clause 5.3.7.2.1.4, it shall be verified that the UUT complies with the maximum Channel Occupancy Time and minimum Idle Period defined in clause 4.3.2.5.2.2.1.</p> <p>For Load Based equipment, using the procedure defined in clause 5.3.7.2.1.4, it shall be verified that the UUT complies with the maximum Channel Occupancy Time defined in clause 4.3.2.5.2.2.2. It shall also be verified (if necessary by repeating the test) that the Idle Period varies between CCA and $q \times CCA$ as defined in clause 4.3.2.5.2.2.2.</p> <p>NOTE 2: For Load Based Equipment referred to in the first paragraph of clause 4.3.2.5.2.2.2 (IEEE 802.11 [i.3] or IEEE 802.15.4 [i.5] equipment), the minimum Idle Period and the maximum Channel Occupancy Time are as defined for other types of Load Based Equipment (see clause 4.3.2.5.2.2.2 points 2 and 3). The CCA observation time is declared by the supplier (see clause 5.3.1 d).</p> <p>Step 3: Adding the interference signal A 100 % duty cycle interference signal is injected on the current operating channel of the UUT. This interference signal shall be a band limited noise signal which has a flat power spectral density, and shall have a bandwidth greater than the Occupied Channel Bandwidth of the UUT. The maximum ripple of this interfering signal shall be $\pm 1,5$ dB within the Occupied Channel Bandwidth and the power spectral density (at the input of the UUT) shall be as defined in clause 4.3.2.5.2.2.1 step 5 (frame based equipment) or clause 4.3.2.5.2.2.2 step 5 (load based equipment).</p> <p>Step 4: Verification of reaction to the interference signal The spectrum analyser shall be used to monitor the transmissions of the UUT on the selected operating channel with the interfering signal injected. This may require the spectrum analyser sweep to be triggered by the start of the interfering signal.</p> <p>Using the procedure defined in clause 5.3.7.2.1.4, it shall be verified that:</p> <ul style="list-style-type: none"> i) The UUT shall stop transmissions on the current operating channel. <p>NOTE 3: The UUT is assumed to stop transmissions within a period equal to the maximum Channel Occupancy Time defined in clauses 4.3.2.5.2.2.1 (frame based equipment) or 4.3.2.5.2.2.2 (load based equipment).</p> <ul style="list-style-type: none"> ii) Apart from Short Control Signalling Transmissions, there shall be no subsequent transmissions while the interfering signal is present. iii) The UUT may continue to have Short Control Signalling Transmissions on the operating channel while the interfering signal is present. These transmissions shall comply with the limits defined in clause 4.3.2.5.3.2. <p>NOTE 4: The verification of the Short Control Signalling transmissions</p> |
|--|---|

| | |
|--|--|
| | <p>may require the analyser settings to be changed (e.g. sweep time).</p> <p>iv) Alternatively, the equipment may switch to a non-adaptive mode.</p> <p>Step 5: Adding the blocking signal</p> <p>With the interfering signal present, a 100 % duty cycle CW signal is inserted as the blocking signal. The frequency and the level are provided in table 6 of clause 4.3.2.10.2.</p> <p>Repeat step 4 to verify that the UUT does not resume any normal transmissions.</p> <p>Step 6: Removing the interference and blocking signal</p> <p>On removal of the interference and blocking signal the UUT is allowed to start transmissions again on this channel however this is not a requirement and therefore does not require testing.</p> <p>Step 7:</p> <p>The steps 2 to 6 shall be repeated for each of the frequencies to be tested.</p> <p>4. Generic test procedure for measuring channel/frequency usage</p> <p>This is a generic test method to evaluate transmissions on the operating (hopping) frequency being investigated. This test is performed as part of the procedures described in clause 5.3.7.2.1.1 up to clause 5.3.7.2.1.3.</p> <p>The test procedure shall be as follows:</p> <p>Step 1:</p> <p>The analyzer shall be set as follows:</p> <p>Centre Frequency: Equal to the hopping frequency or centre frequency of the channel being investigated</p> <p>Frequency Span: 0Hz</p> <p>RBW: ~ 50 % of the Occupied Channel Bandwidth (if the analyser does not support this setting, the highest available setting shall be used)</p> <p>VBW: ≥ RBW (if the analyser does not support this setting, the highest available setting shall be used)</p> <p>Detector Mode: RMS</p> <p>Sweep time: > the Channel Occupancy Time. It shall be noted that if the Channel Occupancy Time is non-contiguous (for non-LBT based Frequency Hopping Systems), the sweep time shall be sufficient to cover the period over which the Channel Occupancy Time is spread out</p> <p>Number of sweep points: see note</p> <p>NOTE: The time resolution has to be sufficient to meet the maximum measurement uncertainty of 5 % for the period to be measured. In most cases, the Idle Period is the shortest period to be measured and thereby defining the time resolution. If the Channel Occupancy Time is non-contiguous (non-LBT based Frequency Hopping Systems), there is no Idle Period to be measured and therefore the time resolution can be increased (e.g. to 5 % of the dwell time) to cover the period over which the Channel Occupancy Time is spread</p> |
|--|--|

| | |
|---------------------|---|
| | <p>out, without resulting in too high a number of sweep points for the analyzer.</p> <p>EXAMPLE 1: For a Channel Occupancy Time of 60 ms, the minimum Idle Period is 3 ms, hence the minimum time resolution should be < 150 μs.</p> <p>EXAMPLE 2: For a Channel Occupancy Time of 2 ms, the minimum Idle Period is 100 μs, hence the minimum time resolution should be < 5 μs.</p> <p>EXAMPLE 3: In case of a system using the non-contiguous Channel Occupancy Time approach (40 ms) and using 79 hopping frequencies with a dwell time of 3,75 ms, the total period over which the Channel Occupancy Time is spread out is 3,2 s. With a time resolution 0,1875 ms (5 % of the dwell time), the minimum number of sweep points is ~ 17 000.</p> <p>Trace mode: Clear / Write</p> <p>Trigger: Video</p> <p>In case of Frequency Hopping Equipment, the data points resulting from transmissions on the hopping frequency being investigated are assumed to have much higher levels compared to data points resulting from transmissions on adjacent hopping frequencies. If a clear determination between these transmissions is not possible, the RBW in step 1 shall be further reduced. In addition, a channel filter may be used.</p> <p>Step 2:</p> <p>Save the trace data to a file for further analysis by a computing device using an appropriate software application or program.</p> <p>Step 3:</p> <p>Identify the data points related to the frequency being investigated by applying a threshold.</p> <p>Count the number of consecutive data points identified as resulting from a single transmission on the frequency being investigated and multiply this number by the time difference between two consecutive data points.</p> <p>Repeat this for all the transmissions within the measurement window.</p> <p>For measuring idle or silent periods, count the number of consecutive data points identified as resulting from a single transmitter off period on the frequency being investigated and multiply this number by the time difference between two consecutive data points.</p> <p>Repeat this for all the transmitter off periods within the measurement window.</p> |
| Measurement Record: | Uncertainty: N/A |
| Test Instruments: | See section 6.0 |
| Test mode: | Normal link mode |

Measurement Data:







| | | | | | |
|---|------|------|------|-------|-----|
| Spectrum Setting: | | | | | |
| RBW: | 8MHz | VBW: | 8MHz | Span: | 0Hz |
| Note: The highest available setting of RBW is 8MHz. | | | | | |

Test plots are below:


| 802.11b mode lowest channel | | 802.11b mode highest channel | |
|---------------------------------------|--------|---------------------------------------|--------|
| AWGN Interference Level (dBm) | -65.45 | AWGN Interference Level (dBm) | -65.32 |
| Blocking Interference Level (dBm) | -30 | Blocking Interference Level (dBm) | -30 |
| AWGN Interference Start Time (ms) | 167.32 | AWGN Interference Start Time (ms) | 147.22 |
| Blocking Interference Start Time (ms) | 217.32 | Blocking Interference Start Time (ms) | 197.22 |
| Suggest q Level | 1 | Suggest q Level | 1 |
| Max COT (ms) | 0.30 | Max COT (ms) | 0.12 |
| Idle Time (ms) | 0.08 | Idle Time (ms) | 0.08 |
| Pulse width (ms) | 0.40 | Pulse width (ms) | 0.30 |
| Duty Cycle (%) | 0.80 | Duty Cycle (%) | 0.60 |

| | |
|--|--|
| | |
| | |
| | |

| 802.11g mode lowest channel | | 802.11g mode highest channel | |
|---------------------------------------|--------|---------------------------------------|--------|
| AWGN Interference Level (dBm) | -61.42 | AWGN Interference Level (dBm) | -62.51 |
| Blocking Interference Level (dBm) | -30 | Blocking Interference Level (dBm) | -30 |
| AWGN Interference Start Time (ms) | 152.30 | AWGN Interference Start Time (ms) | 162.33 |
| Blocking Interference Start Time (ms) | 202.30 | Blocking Interference Start Time (ms) | 212.33 |
| Suggest q Level | 1 | Suggest q Level | 1 |
| Max COT (ms) | 0.12 | Max COT (ms) | 0.12 |
| Idle Time (ms) | 0.08 | Idle Time (ms) | 0.08 |
| Pulse width (ms) | 0.12 | Pulse width (ms) | 0.10 |
| Duty Cycle (%) | 0.24 | Duty Cycle (%) | 0.20 |
| | | | |
| | | | |
| | | | |
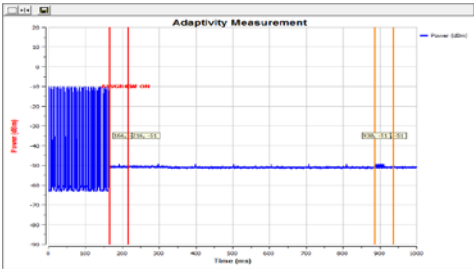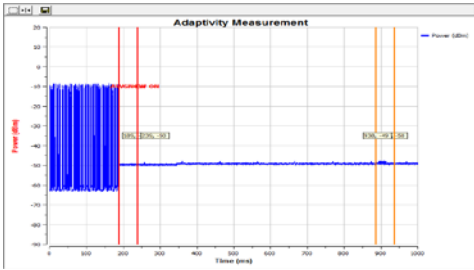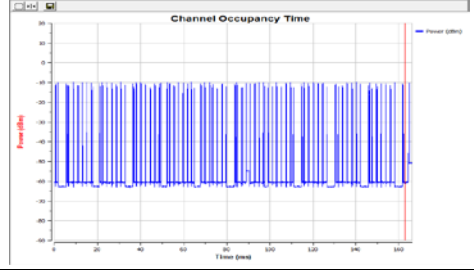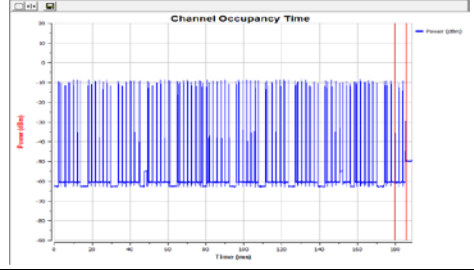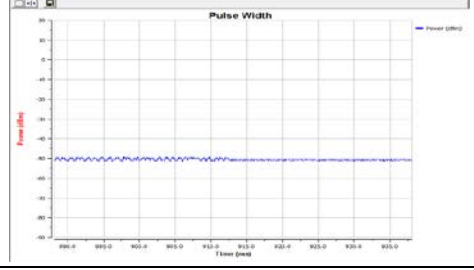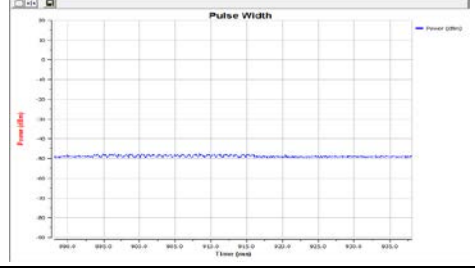
| 802.11n(HT20) mode lowest channel | | 802.11n(HT20) mode highest channel | |
|---|--------|--|--------|
| AWGN Interference Level (dBm) | -61.54 | AWGN Interference Level (dBm) | -62.22 |
| Blocking Interference Level (dBm) | -30 | Blocking Interference Level (dBm) | -30 |
| AWGN Interference Start Time (ms) | 167.36 | AWGN Interference Start Time (ms) | 187.48 |
| Blocking Interference Start Time (ms) | 217.36 | Blocking Interference Start Time (ms) | 237.48 |
| Suggest q Level | 1 | Suggest q Level | 1 |
| Max COT (ms) | 0.08 | Max COT (ms) | 0.10 |
| Idle Time (ms) | 0.08 | Idle Time (ms) | 0.08 |
| Pulse width (ms) | 0.13 | Pulse width (ms) | 0.24 |
| Duty Cycle (%) | 0.26 | Duty Cycle (%) | 0.48 |
|  | |  | |
|  | |  | |
|  | |  | |


| 802.11n(HT40) mode lowest channel | | 802.11n(HT40) mode highest channel | |
|---------------------------------------|--------|---------------------------------------|--------|
| AWGN Interference Level (dBm) | -61.42 | AWGN Interference Level (dBm) | -61.23 |
| Blocking Interference Level (dBm) | -30 | Blocking Interference Level (dBm) | -30 |
| AWGN Interference Start Time (ms) | 110.36 | AWGN Interference Start Time (ms) | 164.49 |
| Blocking Interference Start Time (ms) | 210.36 | Blocking Interference Start Time (ms) | 214.49 |
| Suggest q Level | 1 | Suggest q Level | 1 |
| Max COT (ms) | 0.04 | Max COT (ms) | 0.12 |
| Idle Time (ms) | 0.08 | Idle Time (ms) | 0.08 |
| Pulse width (ms) | 0.36 | Pulse width (ms) | 0.12 |
| Duty Cycle (%) | 0.72 | Duty Cycle (%) | 0.24 |

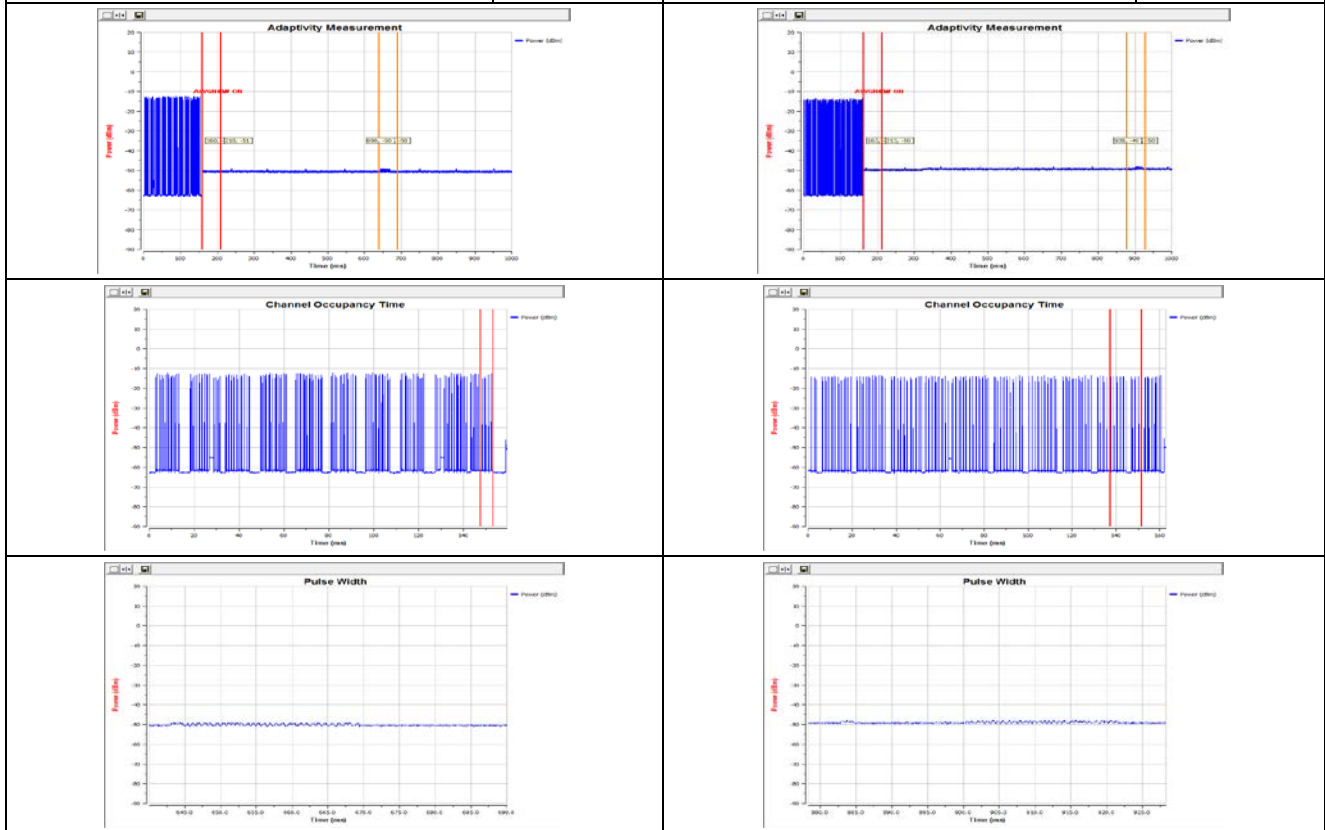

Note:

1. During the test, the signal observed on the channel being investigated is the Short Control Signalling Transmissions.



7.2.4 Occupied Channel Bandwidth


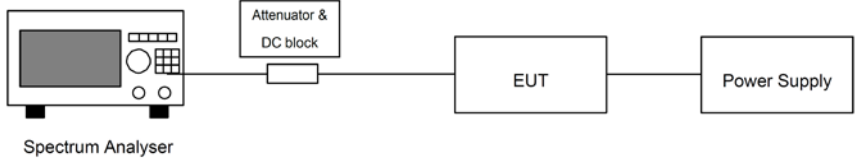
| | | | | | | | | | | | | | |
|-------------------|---|-------------------|--|----------------|---|-----------|---------|-----------------|---|----------------|-----|-------------|---------------|
| Test Requirement: | ETSI EN 300 328 clause 4.3.2.6 | | | | | | | | | | | | |
| Limit: | The Occupied Channel Bandwidth for each hopping frequency shall fall completely within the band 2400MHz ~ 2483.5MHz. For non-adaptive Frequency Hopping equipment with e.i.r.p greater than 10 dBm, the Occupied Channel Bandwidth for every occupied hopping frequency shall be equal to or less than the value declared by the supplier. This declared value shall not be greater than 5 MHz. | | | | | | | | | | | | |
| Test setup: |  <pre> graph LR SA[Spectrum Analyser] --- A[Attenuator & DC block] A --- EUT[EUT] EUT --- PS[Power Supply] </pre> | | | | | | | | | | | | |
| Test Procedure: | <p>Step 1: Connect the UUT to the spectrum analyser and use the following settings:</p> <table border="0"> <tr> <td>Centre Frequency:</td> <td>The centre frequency of the channel under test</td> </tr> <tr> <td>Resolution BW:</td> <td>~ 1 % of the span without going below 1 %</td> </tr> <tr> <td>Video BW:</td> <td>3 × RBW</td> </tr> <tr> <td>Frequency Span:</td> <td>2 × Occupied Channel Bandwidth (e.g. 40 MHz for a 20 MHz channel)</td> </tr> <tr> <td>Detector Mode:</td> <td>RMS</td> </tr> <tr> <td>Trace mode:</td> <td>Clear / Write</td> </tr> </table> <p>Step 2: Wait until the trace is completed. Find the peak value of the trace and place the analyser marker on this peak.</p> <p>Step 3: Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT. This value shall be recorded.</p> <p>NOTE: Make sure that the power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals left and right from the power envelope being taken into account by this measurement.</p> | Centre Frequency: | The centre frequency of the channel under test | Resolution BW: | ~ 1 % of the span without going below 1 % | Video BW: | 3 × RBW | Frequency Span: | 2 × Occupied Channel Bandwidth (e.g. 40 MHz for a 20 MHz channel) | Detector Mode: | RMS | Trace mode: | Clear / Write |
| Centre Frequency: | The centre frequency of the channel under test | | | | | | | | | | | | |
| Resolution BW: | ~ 1 % of the span without going below 1 % | | | | | | | | | | | | |
| Video BW: | 3 × RBW | | | | | | | | | | | | |
| Frequency Span: | 2 × Occupied Channel Bandwidth (e.g. 40 MHz for a 20 MHz channel) | | | | | | | | | | | | |
| Detector Mode: | RMS | | | | | | | | | | | | |
| Trace mode: | Clear / Write | | | | | | | | | | | | |
| Test Instruments: | See section 6.0 | | | | | | | | | | | | |
| Test mode: | Transmitting mode | | | | | | | | | | | | |



Measurement Data:



| 802.11b | | | | | |
|--------------|---------------------|--------------------------|--------------------------------------|---------------------|--------|
| Test Channel | 99% Bandwidth (MHz) | Declared Bandwidth (MHz) | F _L /F _H (MHz) | Limit | Result |
| Lowest | 15.023 | 20 | 2404.53 | 2400MHz ~ 2483.5MHz | Pass |
| Highest | 15.073 | 20 | 2479.53 | | Pass |
| 802.11g | | | | | |
| Test Channel | 99% Bandwidth (MHz) | Declared Bandwidth (MHz) | F _L /F _H (MHz) | Limit | Result |
| Lowest | 17.828 | 20 | 2403.11 | 2400MHz ~ 2483.5MHz | Pass |
| Highest | 17.973 | 20 | 2480.90 | | Pass |
| 802.11n(H20) | | | | | |
| Test Channel | 99% Bandwidth (MHz) | Declared Bandwidth (MHz) | F _L /F _H (MHz) | Limit | Result |
| Lowest | 18.837 | 20 | 2402.63 | 2400MHz ~ 2483.5MHz | Pass |
| Highest | 18.835 | 20 | 2481.38 | | Pass |
| 802.11n(H40) | | | | | |
| Test Channel | 99% Bandwidth (MHz) | Declared Bandwidth (MHz) | F _L /F _H (MHz) | Limit | Result |
| Lowest | 36.505 | 40 | 2403.82 | 2400MHz ~ 2483.5MHz | Pass |
| Highest | 36.506 | 40 | 2480.26 | | Pass |

Test plots are followed:

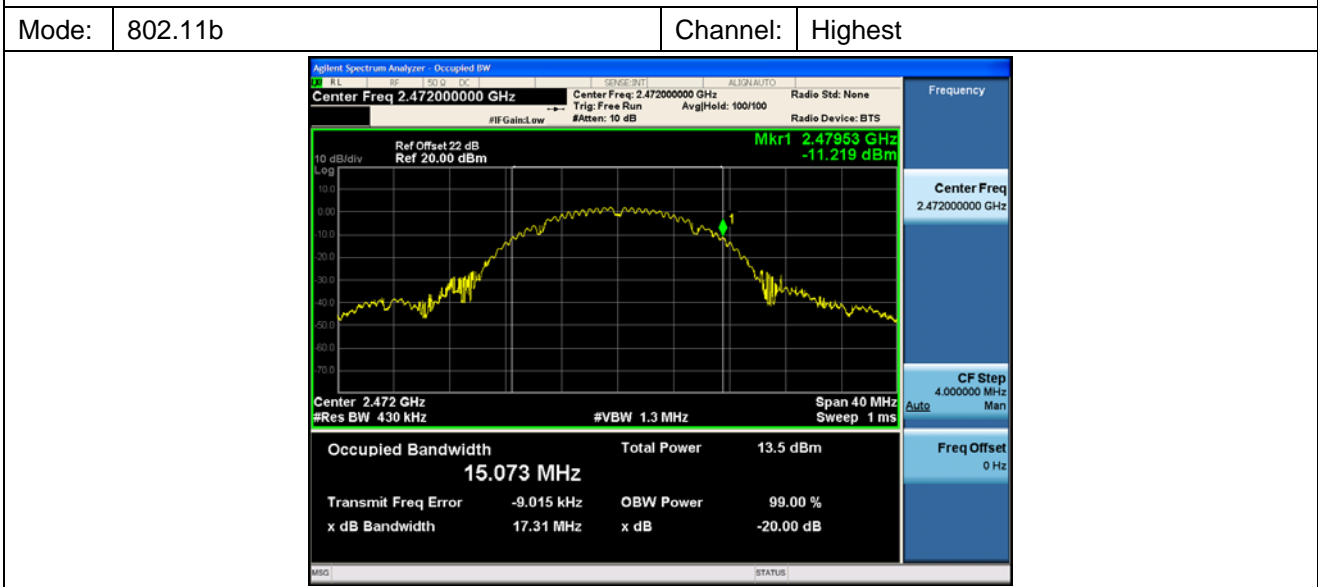
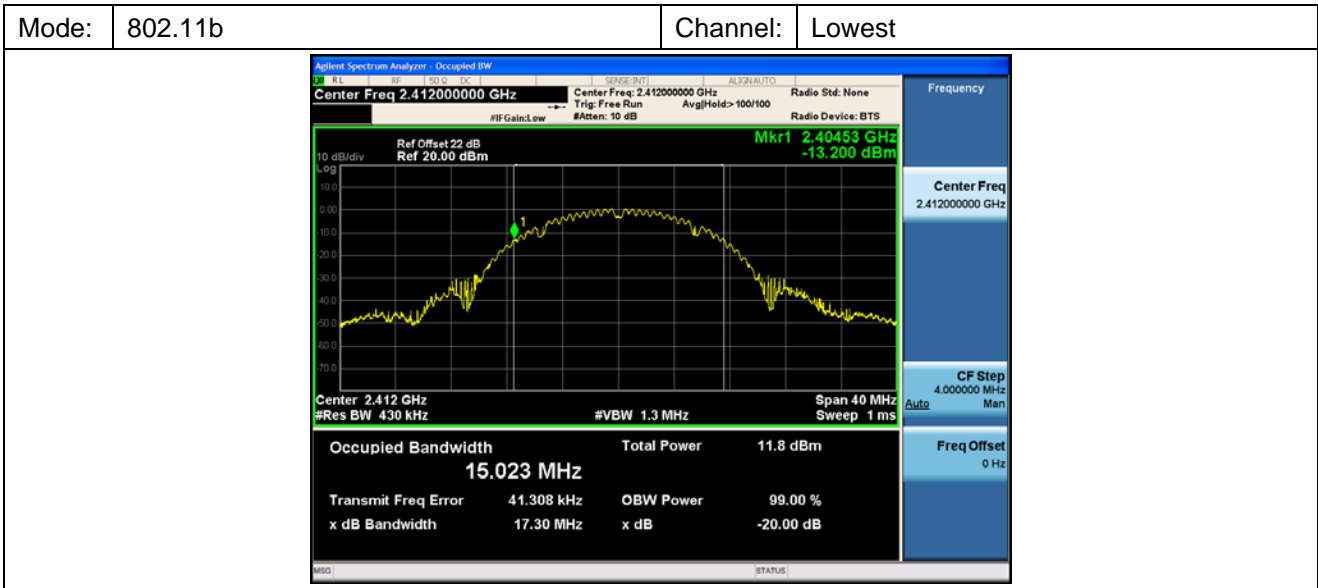


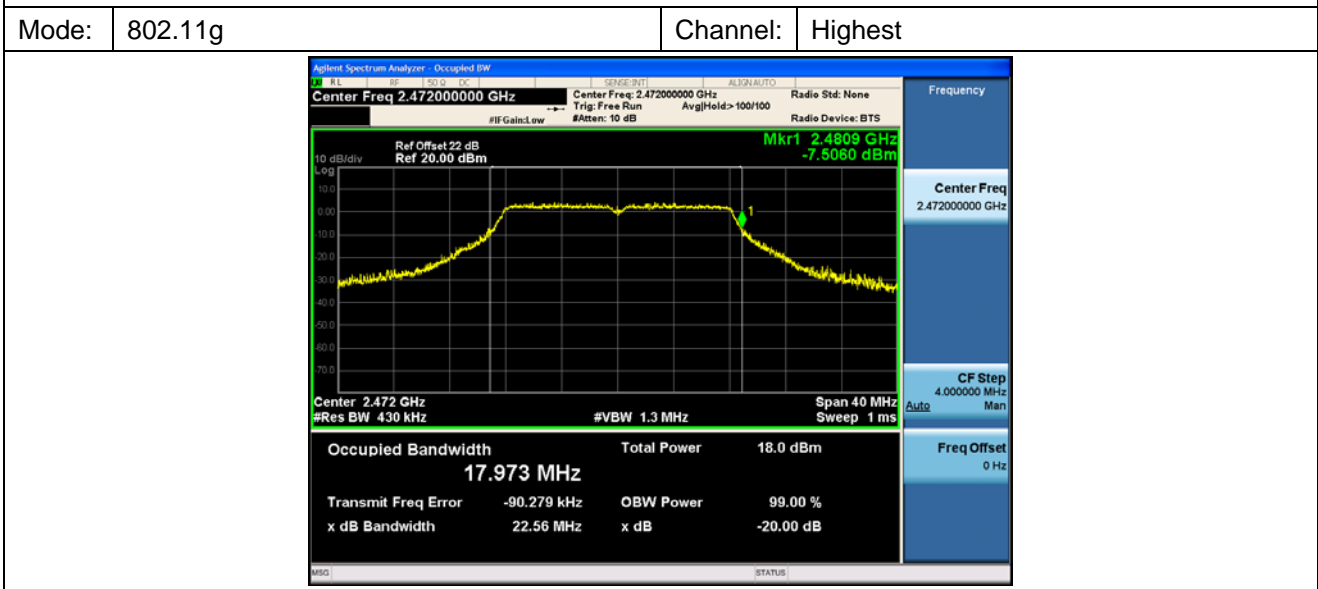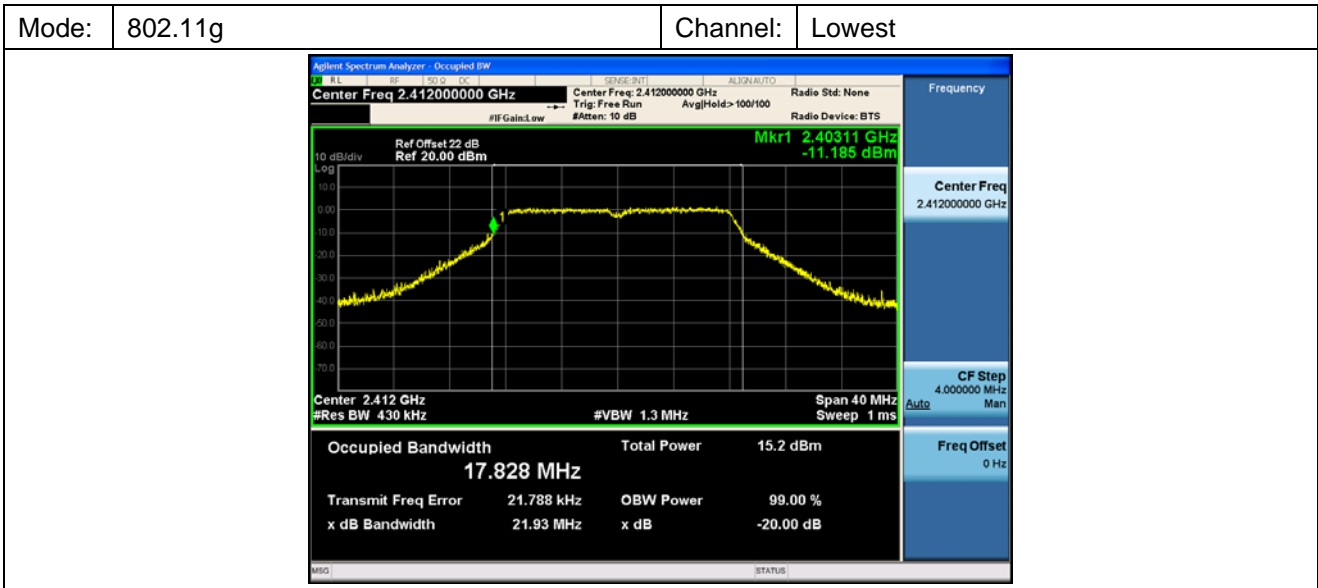

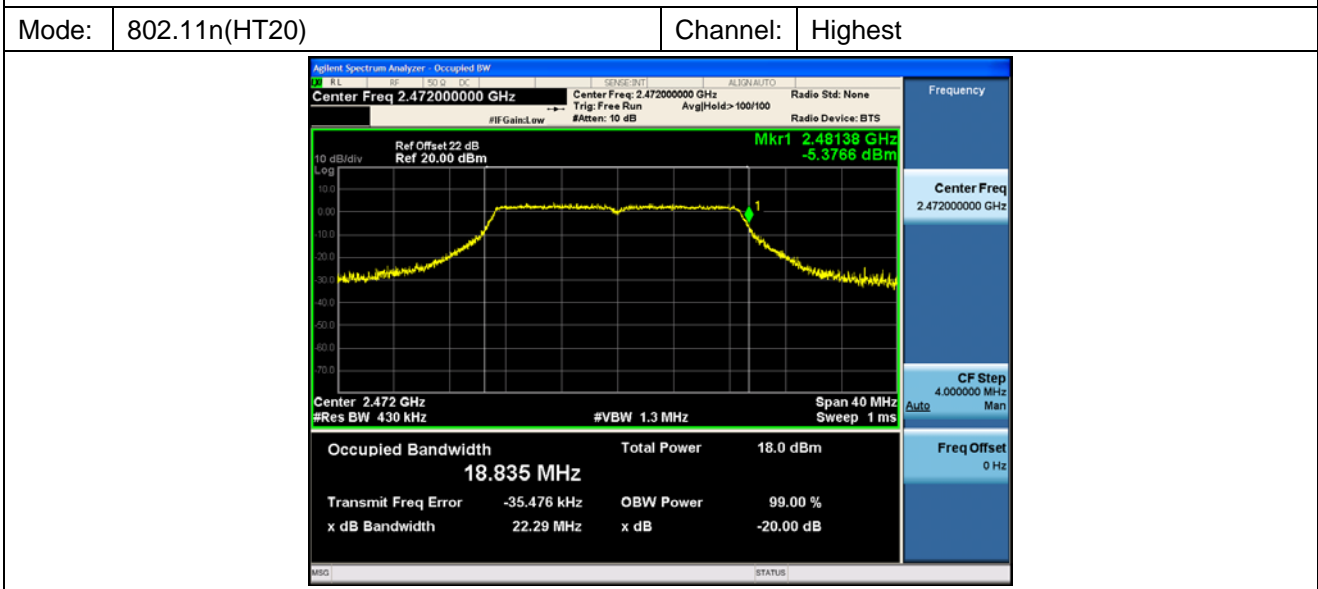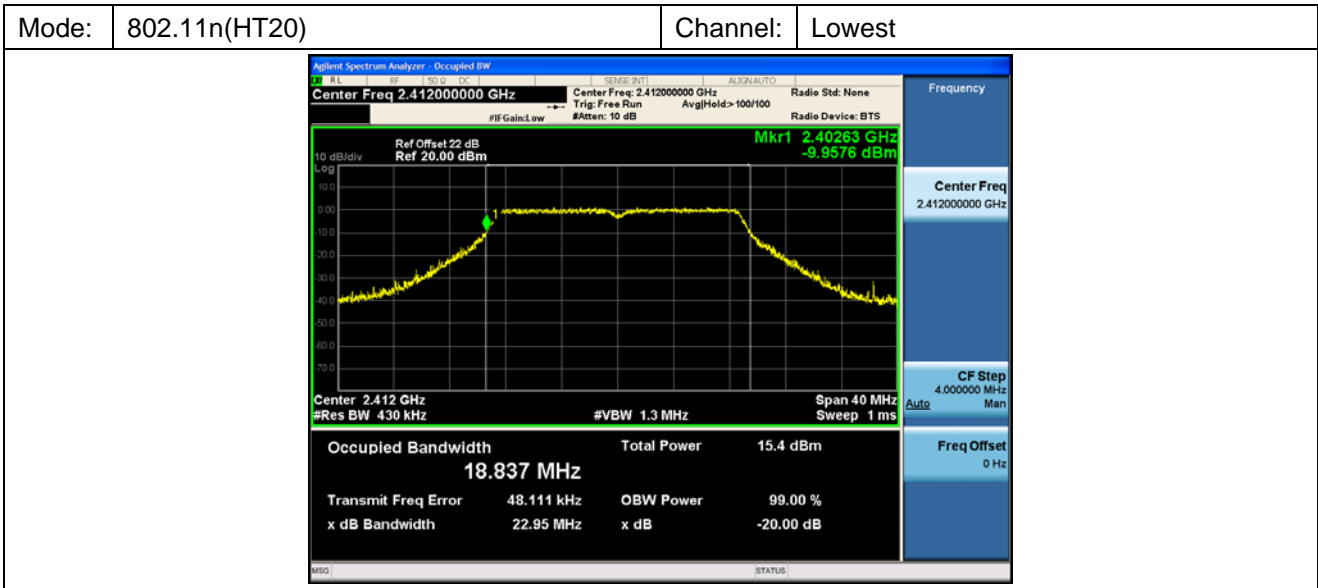

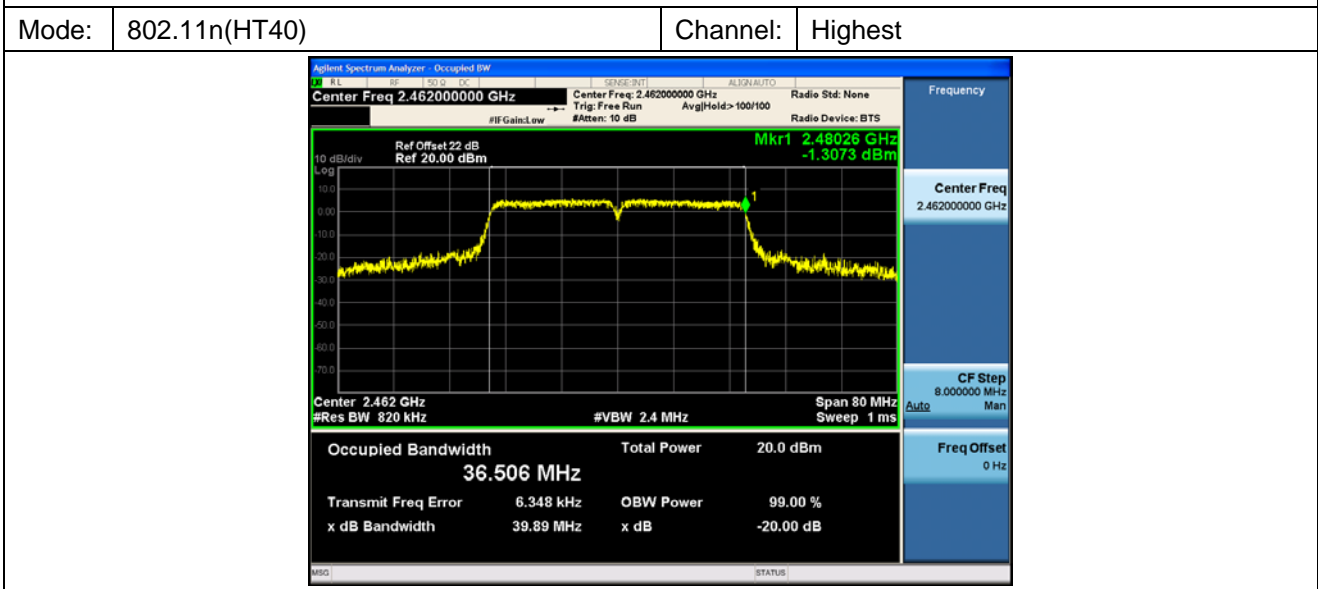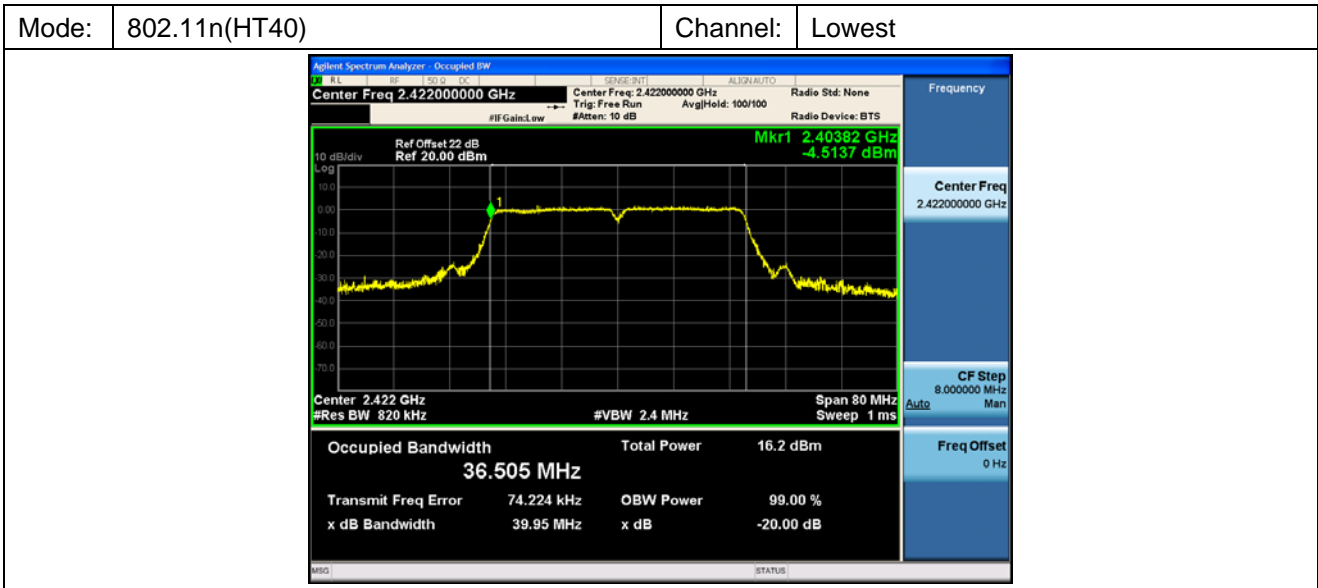

7.2.5 Transmitter unwanted emissions in the OOB domain
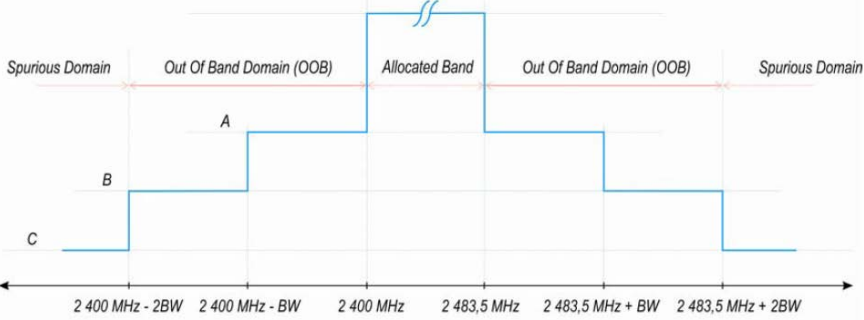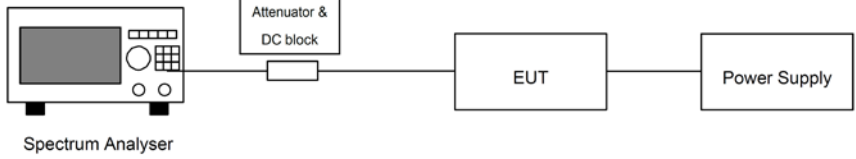
| | |
|-------------------|---|
| Test Requirement: | ETSI EN 300 328 clause 4.3.2.7 |
| Test Method: | ETSI EN 300 328 clause 5.3.9.2 |
| Limit: | <p>The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 1.</p>  <p>A: -10 dBm/MHz e.i.r.p. B: -20 dBm/MHz e.i.r.p. C: Spurious Domain limits</p> <p>BW = Occupied Channel Bandwidth in MHz or 1 MHz whichever is greater</p> <p style="text-align: center;">Figure 1: Transmit mask</p> |
| Test setup: |  <p style="text-align: center;">Spectrum Analyser Attenuator & DC block EUT Power Supply</p> |
| Test procedure: | <p>The applicable mask is defined by the measurement results from the tests performed under clause 5.3.8 (Occupied Channel Bandwidth).</p> <p>The Out-of-band emissions within the different horizontal segments of the mask provided in figures 1 and 3 shall be measured using the steps below. This method assumes the spectrum analyser is equipped with the Time Domain Power option.</p> <p>Step 1:</p> <p>Connect the UUT to the spectrum analyser and use the following settings:</p> <ul style="list-style-type: none"> Centre Frequency: 2 484 MHz Span: Hz Resolution BW: 1 MHz Filter mode: Channel filter Video BW: 3 MHz Detector Mode: RMS Trace Mode: Clear / Write Sweep Mode: Continuous Sweep Points: 5000 Trigger Mode: Video trigger <p>NOTE 1: In case video triggering is not possible, an external trigger</p> |

| | |
|--|--|
| | <p>source may be used.</p> <p>Sweep Time: Suitable to capture one transmission burst</p> <p>Step 2: (segment 2 483,5 MHz to 2 483,5 MHz + BW)</p> <p>Adjust the trigger level to select the transmissions with the highest power level.</p> <p>For frequency hopping equipment operating in a normal hopping mode, the different hops will result in signal bursts with different power levels. In this case the burst with the highest power level shall be selected.</p> <p>Set a window (start and stop lines) to match with the start and end of the burst and in which the RMS power shall be measured using the Time Domain Power function.</p> <p>Select RMS power to be measured within the selected window and note the result which is the RMS power within this 1 MHz segment (2 483,5 MHz to 2 484,5 MHz). Compare this value with the applicable limit provided by the mask.</p> <p>Increase the centre frequency in steps of 1 MHz and repeat this measurement for every 1 MHz segment within the range 2 483,5 MHz to 2 483,5 MHz + BW. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).</p> <p>Step 3: (segment 2 483,5 MHz + BW to 2 483,5 MHz + 2BW)</p> <p>Change the centre frequency of the analyser to 2 484 MHz + BW and perform the measurement for the first 1 MHz segment within range 2 483,5 MHz + BW to 2 483,5 MHz + 2BW. Increase the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + 2 BW - 0,5 MHz.</p> <p>Step 4: (segment 2 400 MHz - BW to 2 400 MHz)</p> <p>Change the centre frequency of the analyser to 2 399,5 MHz and perform the measurement for the first 1 MHz segment within range 2 400 MHz - BW to 2 400 MHz Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2BW + 0,5 MHz.</p> <p>Step 5: (segment 2 400 MHz - 2BW to 2 400 MHz - BW)</p> <p>Change the centre frequency of the analyser to 2 399,5 MHz - BW and perform the measurement for the first 1 MHz segment within range 2 400 MHz - 2BW to 2 400 MHz - BW. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2BW + 0,5 MHz.</p> <p>Step 6:</p> <p>In case of conducted measurements on equipment with a single transmit chain, the declared antenna assembly gain "G" in dBi shall be added to the results for each of the 1 MHz segments and compared with the limits provided by the mask given in figures 1 or 3. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.</p> |
|--|--|

| | |
|---------------------|--|
| | <p>In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), the measurements need to be repeated for each of the active transmit chains. The declared antenna assembly gain "G" in dBi for a single antenna shall be added to these results. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered. Comparison with the applicable limits shall be done using any of the options given below:</p> <p>Option 1: the results for each of the transmit chains for the corresponding 1 MHz segments shall be added. The additional beamforming gain "Y" in dB shall be added as well and the resulting values compared with the limits provided by the mask given in figures 1 or 3.</p> <p>Option 2: the limits provided by the mask given in figures 1 or 3 shall be reduced by $10 \times \log_{10}(A_{ch})$ and the additional beamforming gain "Y" in dB. The results for each of the transmit chains shall be individually compared with these reduced limits.</p> <p>NOTE 2: A_{ch} refers to the number of active transmit chains.</p> <p>It shall be recorded whether the equipment complies with the mask provided in figures 1 or 3.</p> |
| Measurement Record: | Uncertainty: $\pm 1.5\text{dB}$ |
| Test Instruments: | See section 6.0 |
| Test mode: | Transmitting mode |

Measurement Data:


Test plots at normal condition are followed:


| Test Condition: | | | | Normal condition | | | |
|-----------------|---------------|----------|--------|------------------|---------------|----------|---------|
| Mode: | 802.11b | Channel: | Lowest | Mode: | 802.11b | Channel: | Highest |
| | | | | | | | |
| Mode: | 802.11g | Channel: | Lowest | Mode: | 802.11g | Channel: | Highest |
| | | | | | | | |
| Mode: | 802.11n(HT20) | Channel: | Lowest | Mode: | 802.11n(HT20) | Channel: | Highest |
| | | | | | | | |
| Mode: | 802.11n(HT40) | Channel: | Lowest | Mode: | 802.11n(HT40) | Channel: | Highest |
| | | | | | | | |

| Test Condition: | | | | NVLT | | | |
|-----------------|---------------|----------|--------|-------|---------------|----------|---------|
| Mode: | 802.11b | Channel: | Lowest | Mode: | 802.11b | Channel: | Highest |
| | | | | | | | |
| Mode: | 802.11g | Channel: | Lowest | Mode: | 802.11g | Channel: | Highest |
| | | | | | | | |
| Mode: | 802.11n(HT20) | Channel: | Lowest | Mode: | 802.11n(HT20) | Channel: | Highest |
| | | | | | | | |
| Mode: | 802.11n(HT40) | Channel: | Lowest | Mode: | 802.11n(HT40) | Channel: | Highest |
| | | | | | | | |

| | | | | | | | |
|-----------------|---------------|----------|--------|-------|---------------|----------|---------|
| Test Condition: | | | | NVHT | | | |
| Mode: | 802.11b | Channel: | Lowest | Mode: | 802.11b | Channel: | Highest |
| | | | | | | | |
| Mode: | 802.11g | Channel: | Lowest | Mode: | 802.11g | Channel: | Highest |
| | | | | | | | |
| Mode: | 802.11n(HT20) | Channel: | Lowest | Mode: | 802.11n(HT20) | Channel: | Highest |
| | | | | | | | |
| Mode: | 802.11n(HT40) | Channel: | Lowest | Mode: | 802.11n(HT40) | Channel: | Highest |
| | | | | | | | |

7.2.6 Transmitter unwanted emissions in the spurious domain
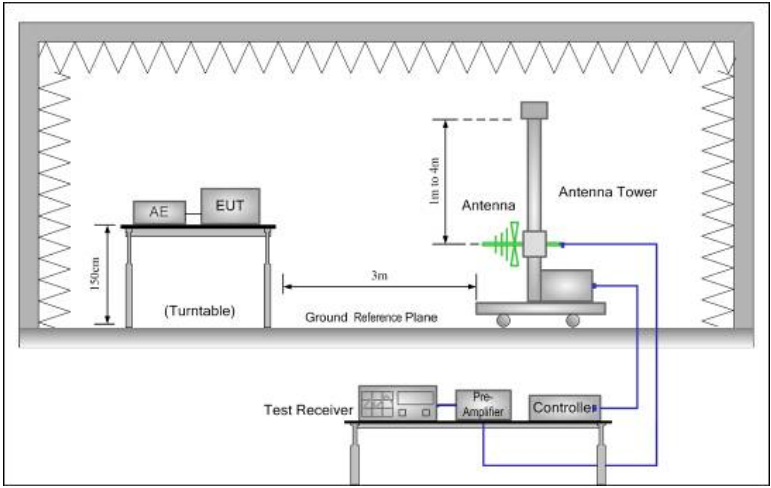
| | | | |
|-----------------------|--|--|-----------|
| Test Requirement: | ETSI EN 300 328 clause 4.3.2.8 | | |
| Test Method: | ETSI EN 300 328 clause 5.3.10.2 | | |
| Limit: | Frequency Range | Maximum power e.r.p. (≤ 1 GHz) e.i.r.p. (> 1 GHz) | Bandwidth |
| | 30 MHz to 47 MHz | -36 dBm | 100 kHz |
| | 47 MHz to 74 MHz | -54 dBm | 100 kHz |
| | 74 MHz to 87.5 MHz | -36 dBm | 100 kHz |
| | 87.5 MHz to 118 MHz | -54 dBm | 100 kHz |
| | 118 MHz to 174 MHz | -36 dBm | 100 kHz |
| | 174 MHz to 230 MHz | -54 dBm | 100 kHz |
| | 230 MHz to 470 MHz | -36 dBm | 100 kHz |
| | 470 MHz to 862 MHz | -54 dBm | 100 kHz |
| | 862 MHz to 1 GHz | -36 dBm | 100 kHz |
| | 1 GHz to 12.75 GHz | -30 dBm | 1 MHz |
| Test Frequency range: | 30MHz to 12.75GHz | | |
| Test setup: | Below 1GHz | | |
| |  | | |
| | Above 1GHz | | |

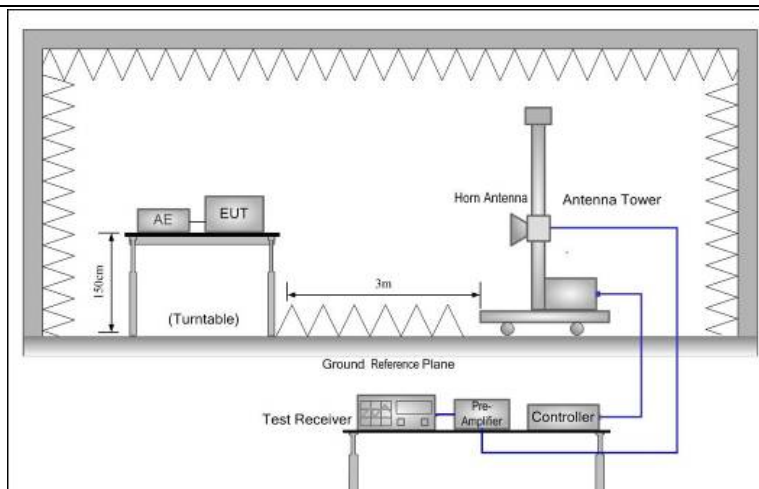

Test procedure:

1. Pre-scan

The test procedure below shall be used to identify potential unwanted emissions of the UUT.

Step 1:

The sensitivity of the spectrum analyser should be such that the noise floor is at least 12 dB below the limits given in tables 1 or 4.

Step 2:

The emissions over the range 30 MHz to 1 000 MHz shall be identified. Spectrum analyser settings:

| | |
|----------------|----------|
| Resolution BW: | 100 kHz |
| Video BW | 300 kHz |
| Detector mode: | Peak |
| Trace Mode: | Max Hold |
| Sweep Points: | ≥ 9970 |

NOTE 1: For spectrum analysers not supporting this high number of sweep points, the frequency band may need to be segmented.

Sweep time: For non continuous transmissions (duty cycle less than 100 %), the sweep time shall be sufficiently long, such that for each 100 kHz frequency step, the measurement time is greater than two transmissions of the UUT.

For Frequency Hopping equipment operating in a normal operating (hopping not disabled) mode, the sweep time shall be further increased to capture multiple transmissions on the same hopping frequency in different hopping sequences.

Allow the trace to stabilize. Any emissions identified during the sweeps above and that fall within the 6 dB range below the applicable limit or above, shall be individually measured using the procedure in clause 5.3.10.2.1.2 and compared to the limits given in tables 1 or 4.

Step 3:

The emissions over the range 1 GHz to 12,75 GHz shall be identified. Spectrum analyser settings:

| | |
|--|--|
| | <p>Resolution BW: 1 MHz Video BW 3 MHz Detector mode: Peak Trace Mode: Max Hold Sweep Points: ≥ 11750</p> <p>NOTE 2: For spectrum analysers not supporting this high number of sweep points, the frequency band may need to be segmented.</p> <p>Sweep time: For non continuous transmissions (duty cycle less than 100 %), the sweep time shall be sufficiently long, such that for each 1 MHz frequency step, the measurement time is greater than two transmissions of the UUT. For Frequency Hopping equipment operating in a normal operating (hopping not disabled) mode, the sweep time shall be further increased to capture multiple transmissions on the same hopping frequency in different hopping sequences.</p> <p>Allow the trace to stabilize. Any emissions identified during the sweeps above that fall within the 6 dB range below the applicable limit or above, shall be individually measured using the procedure in clause 5.3.10.2.1.2 and compared to the limits given in tables 1 or 4.</p> <p>Frequency Hopping equipment may generate a block (or several blocks) of spurious emissions anywhere within the spurious domain. If this is the case, only the highest peak of each block of emissions shall be measured using the procedure in clause 5.3.10.2.1.2.</p> <p>Step 4: In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), the steps 2 and 3 need to be repeated for each of the active transmit chains (Ach). The limits used to identify emissions during this pre-scan need to be reduced with $10 \times \log_{10}(\text{Ach})$ (number of active transmit chains).</p> <p>2. Measurement of the emissions identified during the pre-scan The steps below shall be used to accurately measure the individual unwanted emissions identified during the pre-scan measurements above.</p> <p>Step 1: The level of the emissions shall be measured using the following spectrum analyser settings:</p> <p>Centre Frequency: Frequency of emission identified during the pre-scan Resolution BW: 100 kHz (< 1 GHz) / 1 MHz (> 1 GHz) Video BW 300 kHz (< 1 GHz) / 3 MHz (> 1 GHz) Frequency Span: Wide enough to capture each individual emission indentified during the pre-scan Sweep mode: Continuous Sweep time: Auto</p> |
|--|--|

| | |
|---------------------|---|
| | <p>Trigger: Free run Detector: RMS Trace Mode: Max Hold</p> <p>Step 2: In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), the step 1 needs to be repeated for each of the active transmit chains (Ach). The trace data for each transmit chain has to be recorded. Sum the power in each of the traces for each individual frequency bin.</p> <p>Step 3: Use the marker function to find the highest peak within the measurement trace and record its value and its frequency.</p> <p>Step 4: The measured values shall be compared to the limits defined in tables 1 and 4.</p> |
| Measurement Record: | Uncertainty: $\pm 6\text{dB}$ |
| Test Instruments: | See section 6.0 |
| Test mode: | Transmitting mode |

Measurement Data

| 802.11b mode | | | | | |
|---------------------|-------------------|------------|-------------|-------------|-------------|
| The lowest channel | | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Test Result | |
| | polarization | Level(dBm) | | | |
| 84.03 | Vertical | -70.65 | -36.00 | Pass | |
| 417.76 | V | -66.67 | -36.00 | | |
| 4824.00 | V | -42.47 | -30.00 | | |
| 7236.00 | V | -45.46 | -30.00 | | |
| 9648.00 | V | -41.44 | -30.00 | | |
| 12060.00 | V | -42.75 | -30.00 | | |
| 167.49 | Horizontal | -68.74 | -36.00 | | |
| 612.05 | H | -64.92 | -54.00 | | |
| 4824.00 | H | -44.88 | -30.00 | | |
| 7236.00 | H | -45.38 | -30.00 | | |
| 9648.00 | H | -41.57 | -30.00 | | |
| 12060.00 | H | -43.64 | -30.00 | | |
| The highest channel | | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | | Test Result |
| | polarization | Level(dBm) | | | |
| 132.51 | Vertical | -69.12 | -36.00 | Pass | |
| 579.82 | V | -65.19 | -54.00 | | |
| 4944.00 | V | -41.05 | -30.00 | | |
| 7416.00 | V | -44.09 | -30.00 | | |
| 9888.00 | V | -40.12 | -30.00 | | |
| 12360.00 | V | -41.47 | -30.00 | | |
| 247.94 | Horizontal | -67.22 | -36.00 | | |
| 788.68 | H | -63.46 | -54.00 | | |
| 4944.00 | H | -43.47 | -30.00 | | |
| 7416.00 | H | -44.02 | -30.00 | | |
| 9888.00 | H | -40.26 | -30.00 | | |
| 12360.00 | H | -42.37 | -30.00 | | |

| 802.11g mode | | | | | |
|---------------------|-------------------|------------|-------------|-------------|-------------|
| The lowest channel | | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Test Result | |
| | polarization | Level(dBm) | | | |
| 89.72 | Vertical | -69.24 | -54.00 | Pass | |
| 335.41 | V | -65.31 | -36.00 | | |
| 4824.00 | V | -41.15 | -30.00 | | |
| 7236.00 | V | -44.19 | -30.00 | | |
| 9648.00 | V | -40.22 | -30.00 | | |
| 12060.00 | V | -41.57 | -30.00 | | |
| 117.41 | Horizontal | -67.34 | -54.00 | | |
| 670.00 | H | -63.57 | -54.00 | | |
| 4824.00 | H | -43.58 | -30.00 | | |
| 7236.00 | H | -44.13 | -30.00 | | |
| 9648.00 | H | -40.36 | -30.00 | | |
| 12060.00 | H | -42.47 | -30.00 | | |
| The highest channel | | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | | Test Result |
| | polarization | Level(dBm) | | | |
| 145.96 | Vertical | -69.06 | -36.00 | Pass | |
| 934.62 | V | -65.14 | -36.00 | | |
| 4944.00 | V | -40.99 | -30.00 | | |
| 7416.00 | V | -44.03 | -30.00 | | |
| 9888.00 | V | -40.07 | -30.00 | | |
| 12360.00 | V | -41.42 | -30.00 | | |
| 118.28 | Horizontal | -67.16 | -36.00 | | |
| 747.58 | H | -63.40 | -54.00 | | |
| 4944.00 | H | -43.41 | -30.00 | | |
| 7416.00 | H | -43.97 | -30.00 | | |
| 9888.00 | H | -40.21 | -30.00 | | |
| 12360.00 | H | -42.32 | -30.00 | | |

| 802.11n(HT20) mode | | | | | |
|---------------------|-------------------|------------|-------------|-------------|-------------|
| The lowest channel | | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Test Result | |
| | polarization | Level(dBm) | | | |
| 185.73 | Vertical | -69.03 | -54.00 | Pass | |
| 733.20 | V | -65.11 | -54.00 | | |
| 4824.00 | V | -40.96 | -30.00 | | |
| 7236.00 | V | -44.01 | -30.00 | | |
| 9648.00 | V | -40.04 | -30.00 | | |
| 12060.00 | V | -41.40 | -30.00 | | |
| 195.12 | Horizontal | -67.13 | -54.00 | | |
| 683.89 | H | -63.37 | -54.00 | | |
| 4824.00 | H | -43.39 | -30.00 | | |
| 7236.00 | H | -43.94 | -30.00 | | |
| 9648.00 | H | -40.18 | -30.00 | | |
| 12060.00 | H | -42.29 | -30.00 | | |
| The highest channel | | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | | Test Result |
| | polarization | Level(dBm) | | | |
| 275.96 | Vertical | -69.15 | -36.00 | Pass | |
| 970.47 | V | -65.22 | -36.00 | | |
| 4944.00 | V | -41.07 | -30.00 | | |
| 7416.00 | V | -44.11 | -30.00 | | |
| 9888.00 | V | -40.14 | -30.00 | | |
| 12360.00 | V | -41.49 | -30.00 | | |
| 138.14 | Horizontal | -67.25 | -36.00 | | |
| 855.24 | H | -63.48 | -54.00 | | |
| 4944.00 | H | -43.49 | -30.00 | | |
| 7416.00 | H | -44.05 | -30.00 | | |
| 9888.00 | H | -40.28 | -30.00 | | |
| 12360.00 | H | -42.39 | -30.00 | | |

| 802.11n(HT40) mode | | | | | |
|---------------------|-------------------|------------|-------------|-------------|-------------|
| The lowest channel | | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Test Result | |
| | polarization | Level(dBm) | | | |
| 106.31 | Vertical | -68.94 | -54.00 | Pass | |
| 934.58 | V | -65.03 | -36.00 | | |
| 4824.00 | V | -40.88 | -30.00 | | |
| 7236.00 | V | -43.93 | -30.00 | | |
| 9648.00 | V | -39.97 | -30.00 | | |
| 12110.00 | V | -41.33 | -30.00 | | |
| 144.86 | Horizontal | -67.05 | -36.00 | | |
| 668.43 | H | -63.29 | -54.00 | | |
| 4824.00 | H | -43.31 | -30.00 | | |
| 7236.00 | H | -43.87 | -30.00 | | |
| 9648.00 | H | -40.11 | -30.00 | | |
| 12110.00 | H | -42.22 | -30.00 | | |
| The highest channel | | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | | Test Result |
| | polarization | Level(dBm) | | | |
| 109.09 | Vertical | -69.25 | -54.00 | Pass | |
| 821.87 | V | -65.32 | -54.00 | | |
| 4944.00 | V | -41.17 | -30.00 | | |
| 7416.00 | V | -44.20 | -30.00 | | |
| 9888.00 | V | -40.23 | -30.00 | | |
| 12310.00 | V | -41.58 | -30.00 | | |
| 188.76 | Horizontal | -67.35 | -54.00 | | |
| 581.72 | H | -63.58 | -54.00 | | |
| 4944.00 | H | -43.59 | -30.00 | | |
| 7416.00 | H | -44.14 | -30.00 | | |
| 9888.00 | H | -40.37 | -30.00 | | |
| 12310.00 | H | -42.48 | -30.00 | | |

7.3 Receiver Requirement

7.3.1 Spurious Emissions

| | | | |
|-----------------------|---------------------------------|---|-----------------------|
| Test Requirement: | ETSI EN 300 328 clause 4.3.2.9 | | |
| Test Method: | ETSI EN 300 328 clause 5.3.11.2 | | |
| Limit: | Frequency | Maximum power e.r.p. (≤ 1 GHz) e.i.r.p. (> 1 GHz) | Measurement bandwidth |
| | 30MHz to 1000 MHz | -57 dBm | 100 kHz |
| | 1GHz to 12.75GHz | -47 dBm | 1 MHz |
| Test Frequency range: | 30MHz to 12.75GHz | | |
| Test setup: | Below 1GHz | | |
| | | | |
| Test setup: | Above 1GHz | | |
| | | | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------|--|----------------|---------|----------|---------|----------------|------|-------------|----------|---------------|--------|-------------|------|----------------|-------|----------|-------|----------------|------|-------------|----------|---------------|---------|-------------|------|
| Test procedure: | <p>1. Pre-scan</p> <p>The test procedure below shall be used to identify potential unwanted emissions of the UUT.</p> <p>Step 1:</p> <p>The sensitivity of the spectrum analyser should be such that the noise floor is at least 12 dB below the limits given in tables 2 or 5.</p> <p>Step 2:</p> <p>The emissions over the range 30 MHz to 1 000 MHz shall be identified. Spectrum analyser settings:</p> <table style="margin-left: 20px;"> <tr><td>Resolution BW:</td><td>100 kHz</td></tr> <tr><td>Video BW</td><td>300 kHz</td></tr> <tr><td>Detector mode:</td><td>Peak</td></tr> <tr><td>Trace Mode:</td><td>Max Hold</td></tr> <tr><td>Sweep Points:</td><td>≥ 9970</td></tr> <tr><td>Sweep time:</td><td>Auto</td></tr> </table> <p>Allow the trace to stabilize. Any emissions identified during the sweeps above and that fall within the 6 dB range below the applicable limit or above, shall be individually measured using the procedure in clause 5.3.11.2.1.2 and compared to the limits given in tables 2 or 5.</p> <p>Step 3:</p> <p>The emissions over the range 1 GHz to 12,75 GHz shall be identified. Spectrum analyser settings:</p> <table style="margin-left: 20px;"> <tr><td>Resolution BW:</td><td>1 MHz</td></tr> <tr><td>Video BW</td><td>3 MHz</td></tr> <tr><td>Detector mode:</td><td>Peak</td></tr> <tr><td>Trace Mode:</td><td>Max Hold</td></tr> <tr><td>Sweep Points:</td><td>≥ 11750</td></tr> <tr><td>Sweep time:</td><td>Auto</td></tr> </table> <p>Allow the trace to stabilize. Any emissions identified during the sweeps above that fall within the 6 dB range below the applicable limit or above, shall be individually measured using the procedure in clause 5.3.11.2.1.2 and compared to the limits given in tables 2 or 5.</p> <p>Frequency Hopping equipment may generate a block (or several blocks) of spurious emissions anywhere within the spurious domain. If this is the case, only the highest peak of each block of emissions shall be measured using the procedure in clause 5.3.11.2.1.2.</p> <p>Step 4:</p> <p>In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), the steps 2 and 3 need to be repeated for each of the active transmit chains (Ach). The limits used to identify emissions during this pre-scan need to be reduced with $10 \times \log_{10}(\text{Ach})$ (number of active transmit chains).</p> <p>2. Measurement of the emissions identified during the pre-scan</p> | Resolution BW: | 100 kHz | Video BW | 300 kHz | Detector mode: | Peak | Trace Mode: | Max Hold | Sweep Points: | ≥ 9970 | Sweep time: | Auto | Resolution BW: | 1 MHz | Video BW | 3 MHz | Detector mode: | Peak | Trace Mode: | Max Hold | Sweep Points: | ≥ 11750 | Sweep time: | Auto |
| Resolution BW: | 100 kHz | | | | | | | | | | | | | | | | | | | | | | | | |
| Video BW | 300 kHz | | | | | | | | | | | | | | | | | | | | | | | | |
| Detector mode: | Peak | | | | | | | | | | | | | | | | | | | | | | | | |
| Trace Mode: | Max Hold | | | | | | | | | | | | | | | | | | | | | | | | |
| Sweep Points: | ≥ 9970 | | | | | | | | | | | | | | | | | | | | | | | | |
| Sweep time: | Auto | | | | | | | | | | | | | | | | | | | | | | | | |
| Resolution BW: | 1 MHz | | | | | | | | | | | | | | | | | | | | | | | | |
| Video BW | 3 MHz | | | | | | | | | | | | | | | | | | | | | | | | |
| Detector mode: | Peak | | | | | | | | | | | | | | | | | | | | | | | | |
| Trace Mode: | Max Hold | | | | | | | | | | | | | | | | | | | | | | | | |
| Sweep Points: | ≥ 11750 | | | | | | | | | | | | | | | | | | | | | | | | |
| Sweep time: | Auto | | | | | | | | | | | | | | | | | | | | | | | | |

| | |
|---------------------|--|
| | <p>The steps below shall be used to accurately measure the individual unwanted emissions identified during the pre-scan measurements above.</p> <p>Step 1: The level of the emissions shall be measured using the following spectrum analyser settings:</p> <p>Centre Frequency: Frequency of emission identified during the pre-scan</p> <p>Resolution BW: 100 kHz (< 1 GHz) / 1 MHz (> 1 GHz)</p> <p>Video BW 300 kHz (< 1 GHz) / 3 MHz (> 1 GHz)</p> <p>Frequency Span: Wide enough to capture each individual emission indentified during the pre-scan</p> <p>Sweep mode: Continuous</p> <p>Sweep time: Auto</p> <p>Trigger: Free run</p> <p>Detector: RMS</p> <p>Trace Mode: Max Hold</p> <p>Step 2: In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), the step 1 needs to be repeated for each of the active transmit chains (Ach). The trace data for each transmit chain has to be recorded. Sum the power in each of the traces for each individual frequency bin.</p> <p>Step 3: Use the marker function to find the highest peak within the measurement trace and record its value and its frequency.</p> <p>Step 4: The measured values shall be compared to the limits defined in tables 2 and 5.</p> |
| Measurement Record: | Uncertainty: $\pm 6\text{dB}$ |
| Test mode: | Kept Rx in receiving mode |
| Test Instruments: | See section 6.0 |

Measurement Data:


| 802.11b mode | | | | | |
|---------------------|-------------------|------------|---|-------------|-------------|
| The lowest channel | | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Test Result | |
| | polarization | Level(dBm) | | | |
| 74.61 | Vertical | -70.70 | 2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz. | Pass | |
| 792.07 | V | -70.11 | | | |
| 4824.00 | V | -68.87 | | | |
| 7236.00 | V | -64.77 | | | |
| 9648.00 | V | -61.65 | | | |
| 12060.00 | V | -72.36 | | | |
| 190.42 | Horizontal | -72.25 | | | |
| 511.10 | H | -70.12 | | | |
| 4824.00 | H | -70.21 | | | |
| 7236.00 | H | -61.68 | | | |
| 9648.00 | H | -61.12 | | | |
| 12060.00 | H | -62.41 | | | |
| The highest channel | | | | | |
| Frequency (MHz) | Spurious Emission | | | | Limit (dBm) |
| | polarization | Level(dBm) | | | |
| 58.52 | Vertical | -75.87 | 2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz. | Pass | |
| 616.99 | V | -75.08 | | | |
| 4944.00 | V | -73.66 | | | |
| 7416.00 | V | -69.40 | | | |
| 9888.00 | V | -66.12 | | | |
| 12360.00 | V | -76.68 | | | |
| 149.77 | Horizontal | -77.36 | | | |
| 533.39 | H | -75.04 | | | |
| 4944.00 | H | -74.96 | | | |
| 7416.00 | H | -66.26 | | | |
| 9888.00 | H | -65.55 | | | |
| 12360.00 | H | -66.70 | | | |

| 802.11g mode | | | | | |
|---------------------|-------------------|------------|---|-------------|-------------|
| The lowest channel | | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Test Result | |
| | polarization | Level(dBm) | | | |
| 64.20 | Vertical | -75.47 | 2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz. | Pass | |
| 647.82 | V | -74.70 | | | |
| 4944.00 | V | -73.29 | | | |
| 7416.00 | V | -69.04 | | | |
| 9888.00 | V | -65.77 | | | |
| 12360.00 | V | -76.35 | | | |
| 83.60 | Horizontal | -76.97 | | | |
| 582.30 | H | -74.66 | | | |
| 4944.00 | H | -74.59 | | | |
| 7416.00 | H | -65.91 | | | |
| 9888.00 | H | -65.20 | | | |
| 12360.00 | H | -66.37 | | | |
| The highest channel | | | | | |
| Frequency (MHz) | Spurious Emission | | | | Limit (dBm) |
| | polarization | Level(dBm) | | | |
| 103.56 | Vertical | -76.07 | 2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz. | Pass | |
| 656.02 | V | -75.27 | | | |
| 4944.00 | V | -73.84 | | | |
| 7416.00 | V | -69.57 | | | |
| 9888.00 | V | -66.29 | | | |
| 12360.00 | V | -76.85 | | | |
| 124.74 | Horizontal | -77.56 | | | |
| 741.82 | H | -75.23 | | | |
| 4944.00 | H | -75.14 | | | |
| 7416.00 | H | -66.44 | | | |
| 9888.00 | H | -65.72 | | | |
| 12360.00 | H | -66.86 | | | |

| 802.11n(HT20) mode | | | | | |
|---------------------|-------------------|------------|---|-------------|-------------|
| The lowest channel | | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Test Result | |
| | polarization | Level(dBm) | | | |
| 84.69 | Vertical | -76.17 | 2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz. | Pass | |
| 605.11 | V | -75.37 | | | |
| 4824.00 | V | -73.94 | | | |
| 7236.00 | V | -69.67 | | | |
| 9648.00 | V | -66.38 | | | |
| 12060.00 | V | -76.93 | | | |
| 93.81 | Horizontal | -77.66 | | | |
| 740.53 | H | -75.33 | | | |
| 4824.00 | H | -75.24 | | | |
| 7236.00 | H | -66.53 | | | |
| 9648.00 | H | -65.81 | | | |
| 12060.00 | H | -66.95 | | | |
| The highest channel | | | | | |
| Frequency (MHz) | Spurious Emission | | | | Limit (dBm) |
| | polarization | Level(dBm) | | | |
| 200.67 | Vertical | -75.77 | 2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz. | Pass | |
| 919.69 | V | -74.99 | | | |
| 4944.00 | V | -73.57 | | | |
| 7416.00 | V | -69.31 | | | |
| 9888.00 | V | -66.04 | | | |
| 12360.00 | V | -76.60 | | | |
| 297.74 | Horizontal | -77.27 | | | |
| 932.25 | H | -74.95 | | | |
| 4944.00 | H | -74.87 | | | |
| 7416.00 | H | -66.18 | | | |
| 9888.00 | H | -65.46 | | | |
| 12360.00 | H | -66.62 | | | |

| 802.11n(HT40) mode | | | | | |
|---------------------|-------------------|------------|---|-------------|-------------|
| The lowest channel | | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Test Result | |
| | polarization | Level(dBm) | | | |
| 82.23 | Vertical | -76.45 | 2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz. | Pass | |
| 787.83 | V | -75.64 | | | |
| 4844.00 | V | -74.20 | | | |
| 7266.00 | V | -69.92 | | | |
| 9688.00 | V | -66.62 | | | |
| 12110.00 | V | -77.17 | | | |
| 135.06 | Horizontal | -77.94 | | | |
| 894.02 | H | -75.60 | | | |
| 4844.00 | H | -75.50 | | | |
| 7266.00 | H | -66.78 | | | |
| 9688.00 | H | -66.05 | | | |
| 12110.00 | H | -67.18 | | | |
| The highest channel | | | | | |
| Frequency (MHz) | Spurious Emission | | | | Limit (dBm) |
| | polarization | Level(dBm) | | | |
| 275.79 | Vertical | -75.43 | 2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz. | Pass | |
| 641.22 | V | -74.66 | | | |
| 4924.00 | V | -73.25 | | | |
| 7386.00 | V | -69.00 | | | |
| 9848.00 | V | -65.74 | | | |
| 12310.00 | V | -76.31 | | | |
| 343.79 | Horizontal | -76.93 | | | |
| 650.48 | H | -74.63 | | | |
| 4924.00 | H | -74.56 | | | |
| 7386.00 | H | -65.87 | | | |
| 9848.00 | H | -65.17 | | | |
| 12310.00 | H | -66.33 | | | |



7.3.2 Receiver Blocking
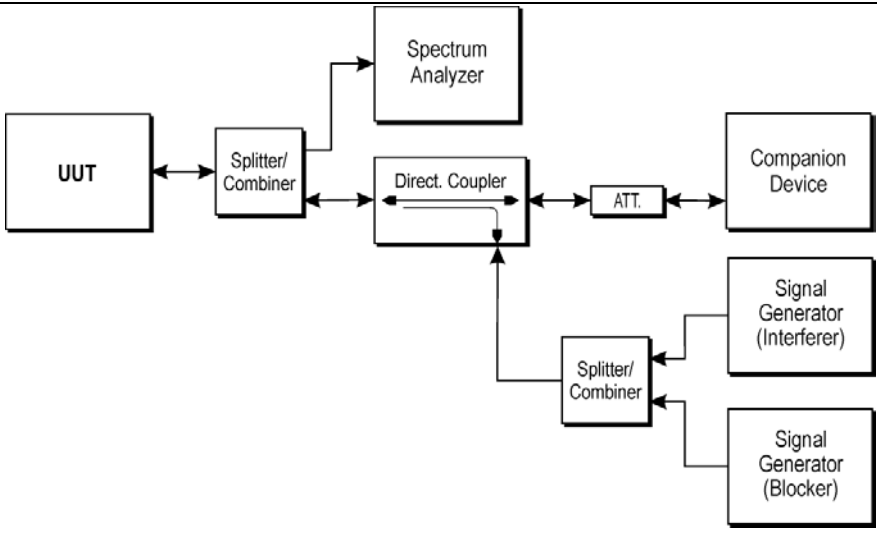
| Test Requirement: | ETSI EN 300 328 clause 4.3.2.10 | | | | | | | | | | | | |
|------------------------------------|---|---------------------------------------|--|---------------------------------------|-----------------------------------|----------------------------------|-----|---|----------------------------------|-----|----|---------|---------|
| Test Method: | ETSI EN 300 328 clause 5.3.7.2.1 | | | | | | | | | | | | |
| Limit: | <p style="text-align: center;">Table 6: Receiver Blocking parameters</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Equipment Type (LBT / non- LBT)</th> <th style="text-align: center;">Wanted signal mean power from companion device</th> <th style="text-align: center;">Blocking signal frequency [MHz]</th> <th style="text-align: center;">Blocking signal power [dBm]</th> <th style="text-align: center;">Type of interfering signal</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">LBT</td> <td style="text-align: center;">sufficient to maintain the link (see note 2)</td> <td rowspan="2" style="text-align: center;">2 395 or 2 488,5 (see note 1)</td> <td rowspan="2" style="text-align: center;">-30</td> <td rowspan="2" style="text-align: center;">CW</td> </tr> <tr> <td style="text-align: center;">Non-LBT</td> <td style="text-align: center;">-30 dBm</td> </tr> </tbody> </table> <p>NOTE 1: The highest blocking frequency shall be used for testing the lowest operating channel, while the lowest blocking frequency shall be used for testing the highest operating channel. NOTE 2: A typical value which can be used in most cases is -50 dBm/MHz.</p> | Equipment Type (LBT / non- LBT) | Wanted signal mean power from companion device | Blocking signal frequency [MHz] | Blocking signal power [dBm] | Type of interfering signal | LBT | sufficient to maintain the link (see note 2) | 2 395 or 2 488,5 (see note 1) | -30 | CW | Non-LBT | -30 dBm |
| Equipment Type (LBT / non- LBT) | Wanted signal mean power from companion device | Blocking signal frequency [MHz] | Blocking signal power [dBm] | Type of interfering signal | | | | | | | | | |
| LBT | sufficient to maintain the link (see note 2) | 2 395 or 2 488,5 (see note 1) | -30 | CW | | | | | | | | | |
| Non-LBT | -30 dBm | | | | | | | | | | | | |
| Test setup: |  | | | | | | | | | | | | |
| Test procedure: | Refer to the procedure of adaptivity | | | | | | | | | | | | |
| Measurement Record: | Uncertainty: N/A | | | | | | | | | | | | |
| Test Instruments: | See section 6.0 | | | | | | | | | | | | |
| Test mode: | Normal link mode | | | | | | | | | | | | |

Measurement Data:

- The EIRP is less than 10dBm, so this test is not applicable.

8 Test setup photo

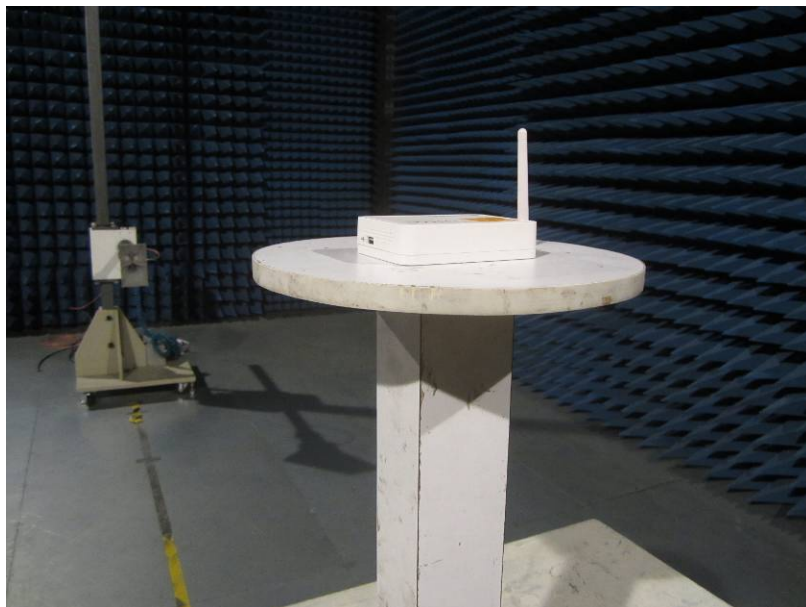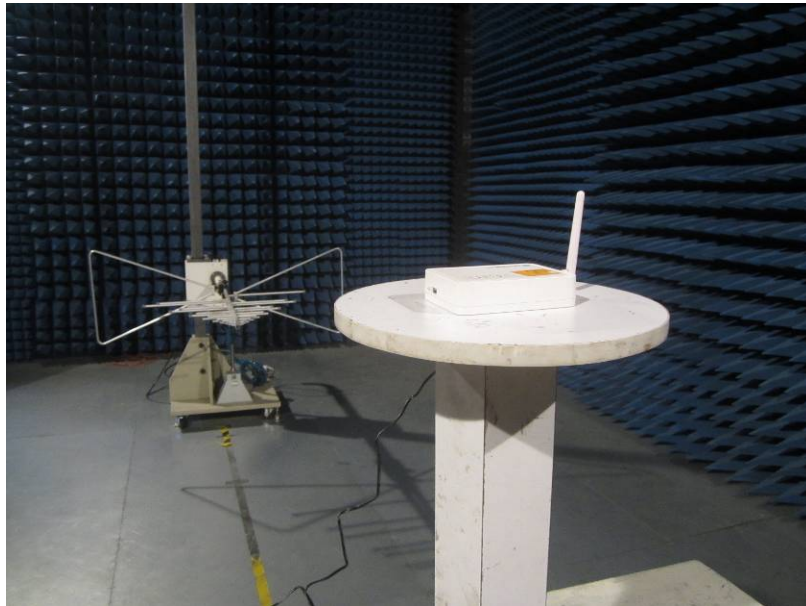

9 EUT Constructional Details

Reference to the test report No. : GTSE15110206701

-----end-----